

NATURAL & SOUND ABSORBING VENTILATION



We inspire at www.duco.eu

HOME OF OXYGEN

Duco Ventilation & Sun Control provides every building with a healthy supply of oxygen. With a comprehensive range of innovative natural and mechanical ventilation systems, either combined with external solar shading or otherwise, Duco offers the ultimate guarantee of a healthy and comfortable indoor climate. The occupant's health is,

therefore, central to Duco. A well-thought-out combination of basic ventilation, mechanical extraction, purge ventilation and solar shading ensures optimum air quality. Duco provides an innovative solution for residential buildings, offices, schools or care centres where everyone feels at home.

Duco, Home of Oxygen

DUCO
Ventilation & Sun Control

GENERAL 4

PRODUCTS 6

BASIC VENTS

| | |
|---------------------|----|
| DucoTop 60 SR..... | 8 |
| DucoPlus 45..... | 10 |
| DucoPlus 60..... | 12 |
| DucoTon 80 SR..... | 14 |
| DucoKlep 80 SR..... | 16 |
| DucoLine 80 SR..... | 18 |
| DucoFlat 80 SR..... | 20 |
| DucoStrip..... | 22 |

SOUND ABSORBING VENTS

| | |
|--------------------------------------|----|
| DucoStrip Acoustic..... | 24 |
| GlasMax SR..... | 26 |
| DucoMax SR / SkyMax SR..... | 28 |
| Silenzio SR / Silenzio Retro SR..... | 30 |

MISCELLANEOUS 32

| | |
|--|----|
| Dimensions and ordering information..... | 32 |
| Controls & ancillaries..... | 37 |

TECHNICAL SPECIFICATION TABLE 40

| | |
|----------------------------|----|
| Basic vents..... | 40 |
| Sound absorbing vents..... | 42 |



DISCLAIMER

Illustrations in this catalogue may differ from actual product. Printing errors and/or changes excepted. Duco reserves the right to amend this information at any time. The information stated is valid as at 26.05.2021 and may be subject to changes in legislation.

A SOLUTION FOR EVERY SITUATION



→ Finish

Every type of window ventilator in this folder complies with **Qualicoat** (as of 01/01/2020 standard **Qualicoat Seaside-A**) and **Qualanod*** quality specifications and is available in **DAR, any RAL colour and in 'Bi-Color'**.*



→ Smart design

Compact housing constructed from aluminium sections. Duco's window ventilators feature a **thermal break***.

* Except DucoTon 80 SR with 12 mm glazing channel



DucoTon 80 SR

→ DucoFilter

This optional filter* **traps pollen and dust particles**. This creates healthier air quality while maintaining excellent airflow.



→ Inner grid

Easy to clean thanks to **easily removable inner grid**.



DucoTop 60 SR

→ For thick glazing units too

Glass-fitted window ventilators available for glass thicknesses **from 6 to 48 mm***.

* See page 33 for a summary by product.

→ Any building situation

Suitable for **new build and renovation projects** in both the residential and non-residential construction industry (offices, schools and healthcare institutions).

→ Any type of window

Easy to fit combined with timber windows as well as sliding windows in plastic, aluminium and steel. The window ventilators can even be **preinstalled in the factory** in many cases.



wood



aluminium



PVC



steel

→ SR valve

The mechanical self-regulating valve **prevents annoying drafts** and achieves energy savings.



GlasMax SR


→ High-rise



The SkyMax SR can be used for heights **up to 70 m**.

→ Operation

Simple operation by handle / cord / rod or hand.

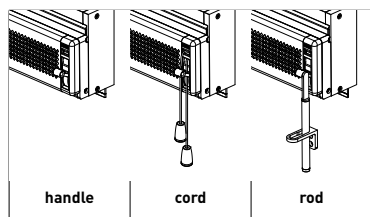

→ Sound absorption



Sustainable sound-absorbing material ensures **acoustic comfort** and does not cause complaints due to allergies.




DucoMax SR / SkyMax SR



PRODUCTOVERVIEW





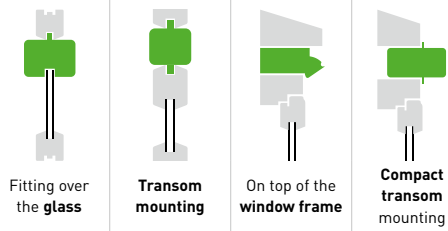





Duco developed a wide range of window ventilators. From acoustic to aesthetically refined vents. Duco can always offer a customized solution: **you name it, we have it!**

POSSIBLE INSTALLATION SITUATIONS



Wind tightness closed position

BASIC VENTS

|  | DucoTop 60 SR Invisible ventilation |   | 650 Pa Class 3 | x | x | ✓ | x | see p. 8 |
|---|--|---|--------------------------|-------------------|---|---|---|-----------|
|  | DucoPlus 45 Minimum glass reduction | | 450 Pa Class 2 | ✓ | x | x | x | see p. 10 |
|  | DucoPlus 60 Compact vent | | 650 Pa Class 3 | ✓ | x | x | x | see p. 12 |
|  | DucoTon 80 SR Timeless classic | | 650 Pa Class 3 | ✓ | ✓ | x | x | see p. 14 |
|  | DucoKlep 80 SR Flat inner grid | | 450 Pa Class 2 | ✓ | ✓ | x | x | see p. 16 |
|  | DucoLine 80 SR One window ventilator, three airflows | | 450 Pa Class 2 | ✓ | ✓ | x | x | see p. 18 |
|  | DucoFlat 80 SR Completely flat vent | | 650 Pa Class 3 | ✓ | ✓ | x | x | see p. 20 |
|  | DucoStrip Aluminium slot ventilators | | 300 Pa Class 2 | Through the frame | | | | see p. 22 |

Legend



Sound absorption
Can be used in projects with
tight or heavy (+) noise exposure



Preheat
Executable with
heat strip

POSSIBLE INSTALLATION SITUATIONS



Fitting over
the **glass**



**Transom
mounting**



On top of the
window frame



**Compact
transom
mounting**

Wind tightness
closed position

SOUND ABSORBING VENTS



DucoStrip Acoustic

Sound absorbing
aluminium slot ventilator



300 Pa
Class 2

Through the frame

see p. 24



DucoTop 60 SR (AK+)

Invisible ventilation



650 Pa
Class 3

✗

✗



✗

see p. 8



GlasMax SR

Compact acoustic ventilator



600 Pa
Class 3



✗



see p. 26



DucoMax SR

Superior sound absorption



600 Pa
Class 2



✗



see p. 28



SkyMax SR

For high-rise applications



600 Pa
Class 2



✗



see p. 28



Silenzio SR



Design wall damper



300 Pa
Class 2

Fitting through the (outer) wall

see p. 30

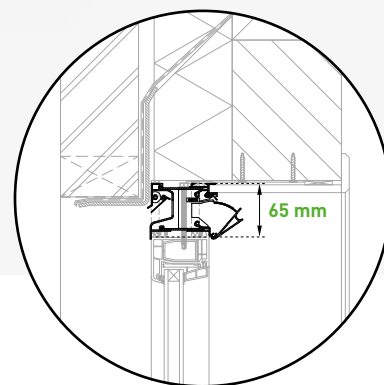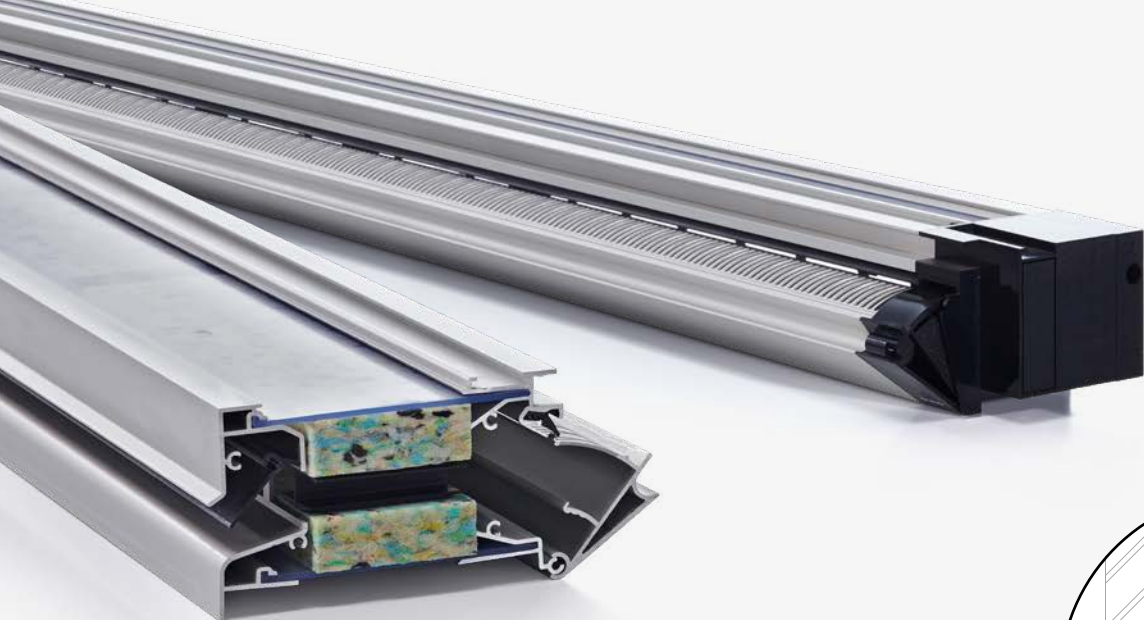

On top of the window frame

DucoTop 60 SR (AK+)

Invisible ventilation

The DucoTop 60 SR comes into its own in terms of aesthetics given that the punching is not visible. The upward airflow guarantees a healthy and comfortable indoor climate. With its variable depth, the DucoTop 60 SR provides a perfect fit for any window section between 68 and 188 mm perfectly. The window ventilator consists of a single unit and is quick and easy to fit. The top is transparent and fitted with pre-drilled fibreglass-reinforced ties. The anchor channel at the top provides a rapid and secure fixing to the solid structure. The inner valve is easy to replace.


In the sound-absorbing configurations, the window ventilator can also be utilised in situations with light (DucoTop 60 SR AK) or heavy (DucoTop 60 SR AK+) noise exposure. The DucoTop 60 is also available as a dummy. By keeping to the same detail throughout the room, this false window ventilator without punching on the outside or inside achieves an aesthetically pleasing solution. Fitting is identical to a normal DucoTop 60 SR.

- Optimum aesthetics thanks to **“concealed” punching**
- **Adjustable depth** for fitting on any window section
- Just **60 mm window ventilator height**
- **Plastic thermal bridge** top and bottom
- Available in an **acoustic configuration**

| | |
|---------------------------------------|---------|
| U-value | 1,80 |
| Wind tightness class closed position | Class 3 |
| Wind tightness closed position | 650 Pa |
| Water tightness class closed position | E650 |
| Water tightness closed position | 650 Pa |

Standards: consult the table on page 40.



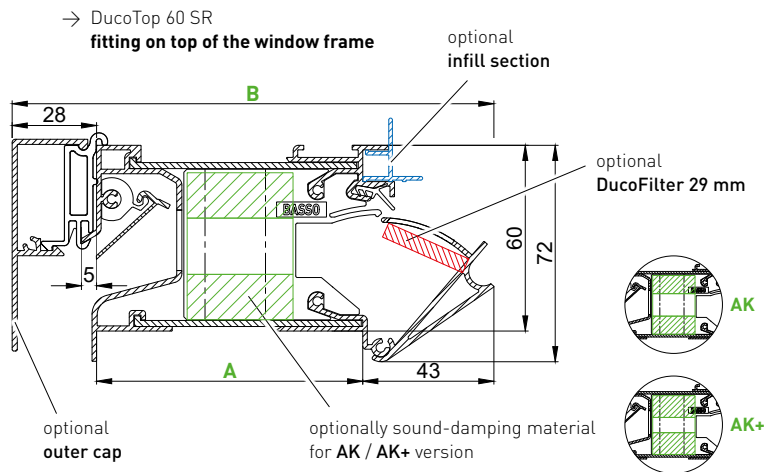

FITTING DEPTHS

The DucoTop 60 SR is **in and extendable** in depth on each frame profile.

| Version | Dimension A [see drawing] | | Dimension B [see drawing] | |
|---------------|------------------------------|------|------------------------------|------|
| | min. | max. | min. | max. |
| Corto | 68 | 88 | 139 | 159 |
| Basso | 88 | 108 | 159 | 179 |
| Medio | 108 | 128 | 179 | 199 |
| Alto | 128 | 148 | 199 | 219 |
| Largo | 148 | 168 | 219 | 239 |
| Grando | 168 | 188 | 239 | 259 |

→ Ventilation- and sound reduction performance

| Type DucoTop 60 SR + fitting depth | | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption $D_{n,e}, W(C;C_{tr})^*$ in dB | |
|--|-----|----------------------------|------|-------|-----------------------------|------|-------|----------------------------------|--------------------------------|---|-----------------|
| | | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| Corto 68-88 mm | STD | 12,9 | 17,9 | 13,8 | 46,4 | 64,5 | 49,8 | 16415 | 19500 | 26 [0;-1] | 47 [-1,-2] |
| | AK | 13,5 | 17,9 | 13,8 | 48,6 | 64,5 | 49,8 | 17179 | 19500 | 28 [0;-2] | 45 [-1,-2] |
| | AK+ | 8,9 | 12,3 | 14,9 | 32,0 | 44,2 | 53,7 | 11325 | 19500 | 30 [-1;-2] | 50 [0;-2] |
| Basso 88-108 mm | STD | 12,9 | 17,9 | 13,8 | 46,4 | 64,5 | 49,8 | 16415 | 19500 | 26 [0;-1] | 46 [0;-1] |
| | AK | 13,3 | 17,9 | 13,8 | 47,9 | 64,5 | 49,8 | 16924 | 19500 | 29 [0;-1] | 48 [-1,-2] |
| | AK+ | 8,3 | 12,3 | 14,9 | 29,9 | 44,2 | 53,7 | 10562 | 19500 | 32 [0;-2] | 53 [-1,-3] |
| Medio 108-128 mm | STD | 12,6 | 17,9 | 13,8 | 45,4 | 64,5 | 49,8 | 16034 | 19500 | 27 [-1;-1] | 49 [0;-1] |
| | AK | 13,0 | 17,9 | 13,8 | 46,8 | 64,5 | 49,8 | 16543 | 19500 | 30 [0;-2] | 50 [0;-2] |
| | AK+ | 8,1 | 12,3 | 14,9 | 29,2 | 44,2 | 53,7 | 10307 | 19500 | 34 [0;-2] | 55 [-1,-4] |
| Alto 128-148 mm | STD | 12,8 | 17,9 | 13,8 | 46,1 | 64,5 | 49,8 | 16288 | 19500 | 27 [0;-1] | 45 [-1,-3] |
| | AK | 13,1 | 17,9 | 13,8 | 47,2 | 64,5 | 49,8 | 16670 | 19500 | 31 [0;-1] | 53 [-1,-4] |
| | AK+ | 8,1 | 12,3 | 14,9 | 29,2 | 44,2 | 53,7 | 10307 | 19500 | 34 [0;-1] | 54 [-1,-4] |
| Largo 148-168 mm | STD | 13,0 | 17,9 | 13,8 | 46,8 | 64,5 | 49,8 | 16543 | 19500 | 27 [0;-1] | 50 [0;-1] |
| | AK | 12,9 | 17,9 | 13,8 | 46,4 | 64,5 | 49,8 | 16415 | 19500 | 33 [-1;-2] | 53 [-1,-4] |
| | AK+ | 7,7 | 12,3 | 14,9 | 27,7 | 44,2 | 53,7 | 9798 | 19500 | 37 [0;-2] | 55 [-1,-4] |
| Grando 168-188 mm | STD | 12,8 | 17,9 | 13,8 | 46,1 | 64,5 | 49,8 | 16288 | 19500 | 28 [0;-1] | 48 [0;-2] |
| | AK | 12,6 | 17,9 | 13,8 | 45,4 | 64,5 | 49,8 | 16034 | 19500 | 33 [-1;-2] | 54 [-1,-4] |
| | AK+ | 7,9 | 12,3 | 14,9 | 28,4 | 44,2 | 53,7 | 10053 | 19500 | 39 [0;-2] | 55 [-1,-4] |

* According to EN ISO 717

For values with the DucoFilter, see the table on page 40.

CLIMA




The **ClimaTop 60** is an electronically-controlled variant that is capable of preheating the fresh outside air by means of an internal heat strip if the outdoor temperature falls below 12 °C. This ensures optimal comfort at low outdoor temperatures.



→ ClimaTop 60



→ Dimensions & order information: see page 32 → Controls & ancillaries: see page 37
→ Full specifications: see page 40

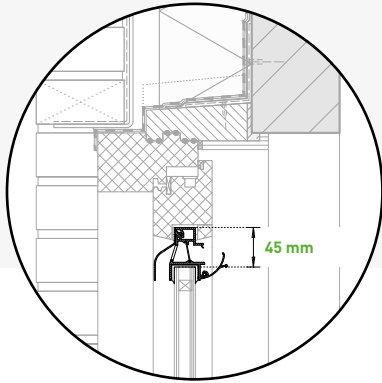

Fitting over the **glass**

Duco**Plus** 45

Minimum glass reduction

DucoPlus 45 is a controllable, aluminium glazed-in window ventilator featuring a curved canopy that guarantees superior weatherability. The positive-action inner tip directs the flow of incoming air upwards.


- Glass reduction of just **45 mm**
- **Thermal** break
- **Insect-resistant**

| | |
|--|---------|
| U-value | 1,84 |
| Wind tightness class closed position | Class 2 |
| Wind tightness closed position | 450 |
| Water tightness class closed position | E900 |
| Water tightness closed position | 900 |
| Glass reduction | 45 mm |

Standards: consult the table on page 40.



→ DucoPlus 45
fitting over the glass

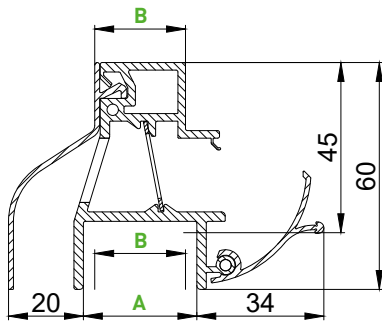

VERSIONS WITH GLASS PROFILE



| | Dimensions (mm) | | |
|-----------------------------|-----------------|----|----|
| Glass profile (A) | 30 | 34 | 38 |
| Glass thickness* (B) | 24 | 28 | 32 |

* The specified glass thickness is applicable to [Duco] glazing rubber. When kitting, you should take a minimum of 4 mm and maximum of 8 mm difference between glass thickness and glass profile.

→ Ventilation- and sound reduction performance

| Type | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m ³ /h/m at... | | | Equivalent area at 1 Pa in mm ² /m | Geometrical Free Area in mm ² /m | Sound absorption D _{n,e} , W (C _i ;C _{tr}) [*] in dB | |
|-------------|----------------------------|-------|-------|--|-------|-------|---|---|---|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| DucoPlus 45 | 7,1 | 10,03 | 22,50 | 25,56 | 36,10 | 81,00 | 8980 | 10000 | 25 (0;0) | 41 (-1;-2) |

* According to EN ISO 717

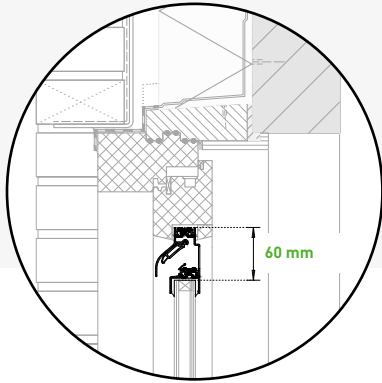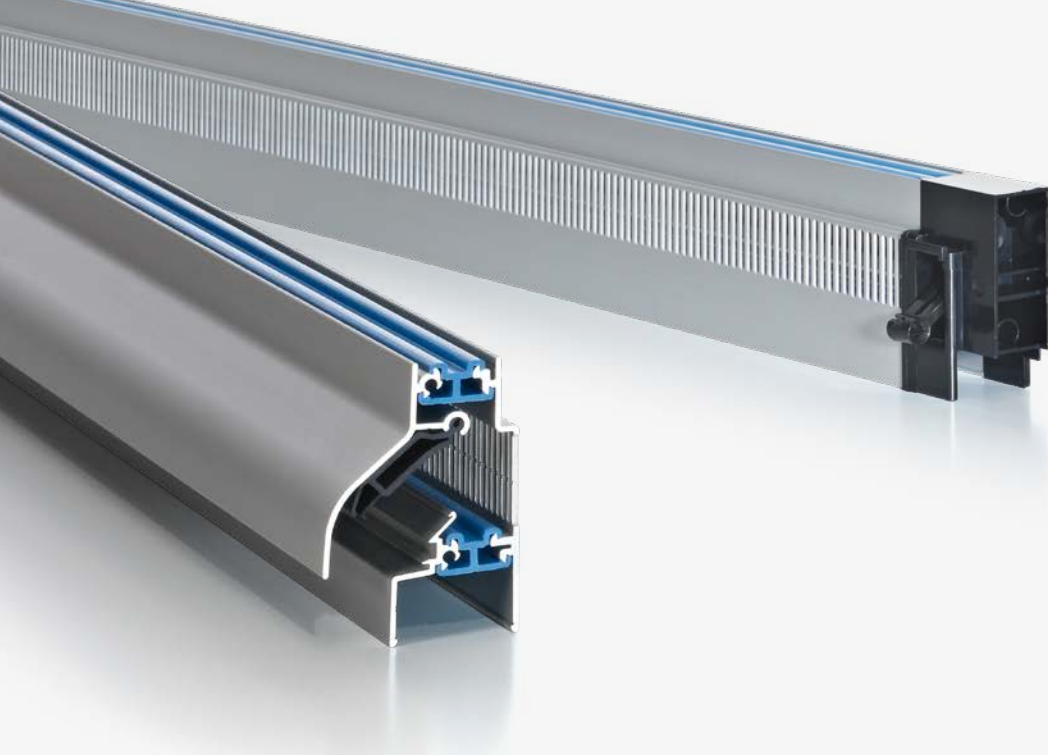

Fitting over the **glass**

DucoPlus 60

Compact vent

DucoPlus 60 is a compact flap window ventilator. This ventilator ensures excellent airflow in spite of a glass reduction of just 60 mm. The perforated inner grid keeps insects out.


- **Minimal glass reduction**, maximum airflow
- Favourable **acoustic** properties
- Authentic Duco '**Soft-Line**' design

| | |
|--|---------|
| U-value | 4,02 |
| Wind tightness class closed position | Class 3 |
| Wind tightness closed position | 650 |
| Water tightness class closed position | E650 |
| Water tightness closed position | 650 |
| Glass reduction | 60 mm |

Standards: consult the table on page 40.



→ DucoPlus 60
fitting over the glass

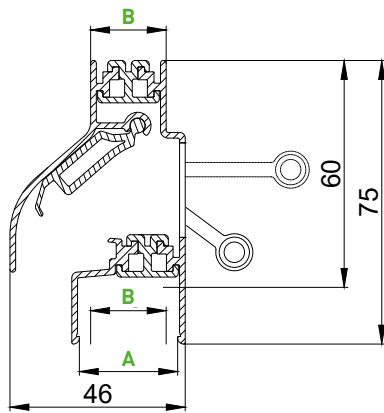

VERSIONS WITH GLASS PROFILE


| | Dimensions (mm) | | | |
|-----------------------------|-----------------|----|----|----|
| Glass profile (A) | 26 | 30 | 34 | 38 |
| Glass thickness* (B) | 20 | 24 | 28 | 32 |

* The specified glass thickness is applicable to [Duco] glazing rubber. When kitting, you should take a minimum of 4 mm and maximum of 8 mm difference between glass thickness and glass profile.


→ Ventilation- and sound reduction performance

| Type | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption $D_{n,e}, W(C;C_{tr})^*$ in dB | |
|------|----------------------------|------|-------|-----------------------------|------|-------|----------------------------------|--------------------------------|---|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| | DucoPlus 60 | 11,2 | 15,8 | 34,9 | 40,3 | 56,7 | | | 125,6 | 14224 |

* According to EN ISO 717

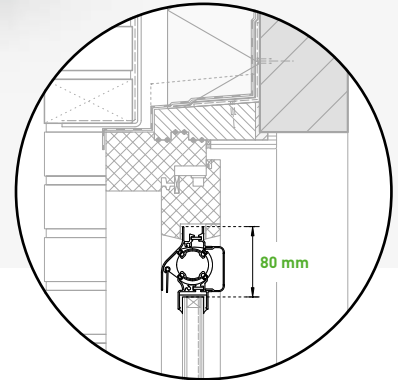

Fitting over the **glass**

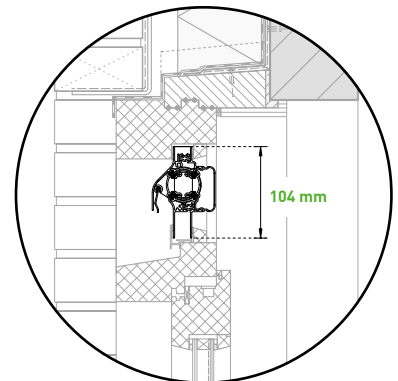

Transom mounting

DucoTon 80 SR

Timeless classic

DucoTon 80 SR is a self-regulating 'rotating drum' window ventilator with a 'Soft-Line' design outer section. This window ventilator was introduced in 1992 and is being used with complete satisfaction in many projects.


- Authentic Duco '**Soft-Line**' design
- **Double sealing** with brushes with Finseal insert
- **Glass reduction 80** is superb
- Excellent **thermal performance**
- Can be used with **any glass thickness** (up to 36 mm)

| | |
|--|---------|
| U-value | 2,26 |
| Wind tightness class closed position | Class 3 |
| Wind tightness closed position | 650 |
| Water tightness class closed position | 8A |
| Water tightness closed position | 450 |
| Glass reduction | 80 mm |


Standards: consult the table on page 40.



→ DucoTon 80 SR
fitting over the glass

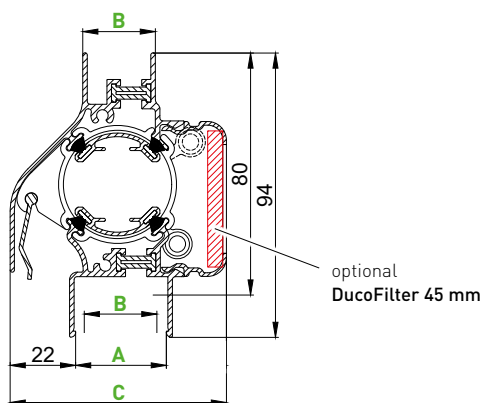

→ DucoTon 80 SR
transom mounting

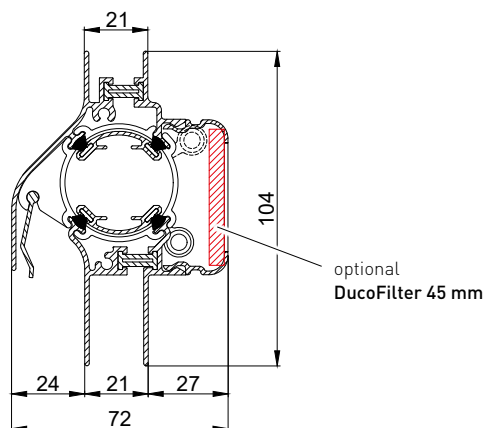

VERSIONS WITH GLASS PROFILE

| | Dimensions (mm) | | | | | | |
|-----------------------------|-----------------|----|----|----|----|----|----|
| Glass profile (A) | 12 | 21 | 26 | 30 | 34 | 38 | 42 |
| Glass thickness* (B) | 6 | 15 | 21 | 24 | 28 | 32 | 36 |
| Vent depth (C) | 72 | 72 | 72 | 72 | 79 | 79 | 79 |



GG 12: Bi-color and SR-flap not possible
 GG 21: Only available in DAR, RAL 9010 or RAL 9001 and SR-flap not possible
 * The specified glass thickness is applicable to (Duco) glazing rubber. When kitting, you should take a minimum of 4 mm and maximum of 8 mm difference between glass thickness and glass profile.

→ Ventilation- and sound reduction performance


| Type | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption D _{n,e} , W (C; C _{tr})* in dB | |
|---------------|----------------------------|------|-------|-----------------------------|------|-------|----------------------------------|--------------------------------|--|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| DucoTon 80 SR | 10,2 | 12,3 | 15,7 | 36,7 | 44,3 | 56,6 | 12980 | 14400 | 27 [-1;-1] | 34 [0;-1] |

For values with the DucoFilter, see the table on page 40.

* According to EN ISO 717

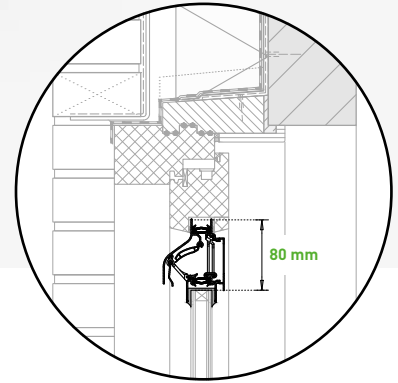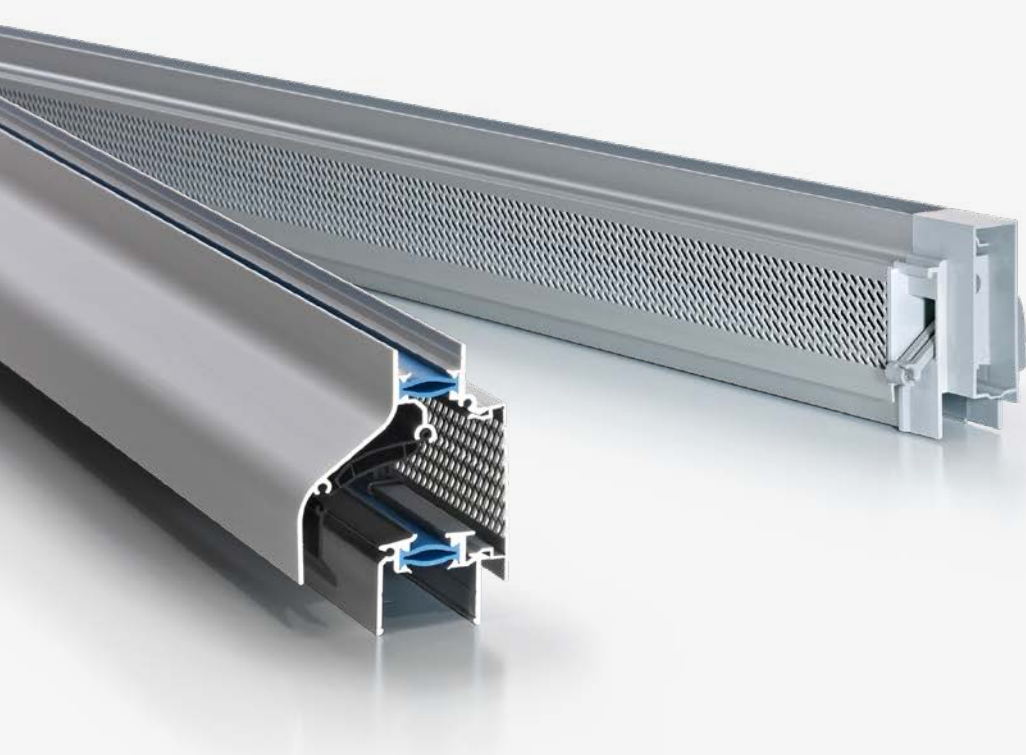

Fitting over the **glass**

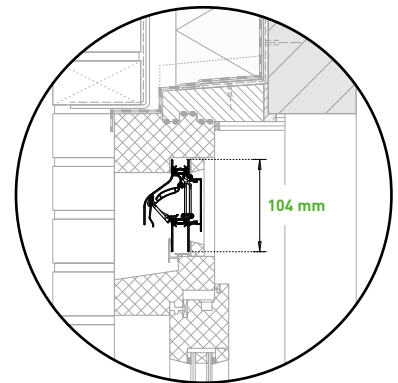

Transom mounting

Duco**Klep** 80 SR

Flat inner grid

DucoKlep 80 SR is a self-regulating flap ventilator with a completely flat inner grid. This makes it exceptionally suitable for applications in the fixed pane of a sliding window. The vent then, comes with a thumb control handle.


- Authentic Duco '**Soft-Line**' design
- Suitable for applications in the fixed panes of a **sliding window**
- **Glass reduction 80** is superb
- **Excellent airflow**
- Can be used with **any glass thickness** (up to 48 mm)

| | |
|--|---------|
| U-value | 2,4 |
| Wind tightness class closed position | Class 2 |
| Wind tightness closed position | 450 |
| Water tightness class closed position | E650 |
| Water tightness closed position | 650 |
| Glass reduction | 80 mm |


Standards: consult the table on page 40.



→ DucoKlep 80 SR
fitting over the glass

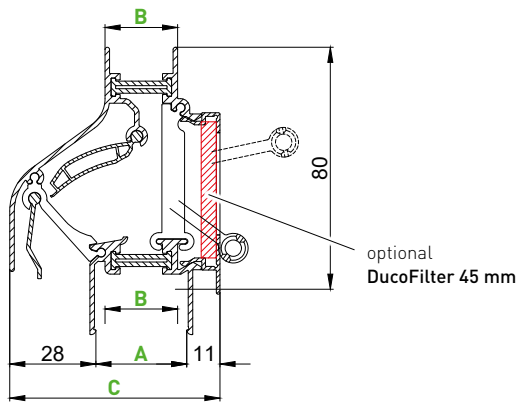

→ DucoKlep 80 SR
transom mounting

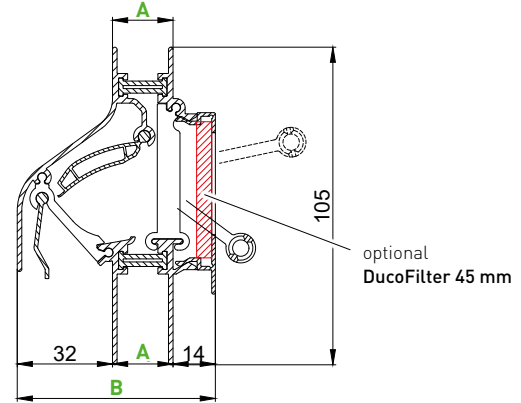

VERSIONS WITH GLASS PROFILE

| | Dimensions (mm) | | | | | | | |
|----------------------|-----------------|----|----|----|----|----|----|----|
| Glass profile (A) | 26 | 30 | 34 | 38 | 42 | 46 | 50 | 54 |
| Glass thickness* (B) | 20 | 24 | 28 | 32 | 36 | 40 | 44 | 48 |
| Vent depth (C) | 63 | 67 | 71 | 75 | 79 | 83 | 87 | 91 |

* The specified glass thickness is applicable to [Duco] glazing rubber. When kitting, you should take a minimum of 4 mm and maximum of 8 mm difference between glass thickness and glass profile.

VERSIONS WITH TRANSOM PROFILE


| | Dimensions (mm) | |
|---------------------|-----------------|----|
| Transom profile (A) | 20 | 24 |
| Vent depth (B) | 66 | 70 |

→ Ventilation- and sound reduction performance


| Type | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption $D_{n,e}, W(C;C_{tr})^*$ in dB | |
|----------------|----------------------------|------|-------|-----------------------------|------|-------|----------------------------------|--------------------------------|---|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| DucoKlep 80 SR | 15,2 | 15,5 | 15,6 | 54,7 | 55,9 | 56,3 | 19342 | 19200 | 25 (0;-1) | 37 (0;0) |

* According to EN ISO 717

For values with the DucoFilter, see the table on page 40.

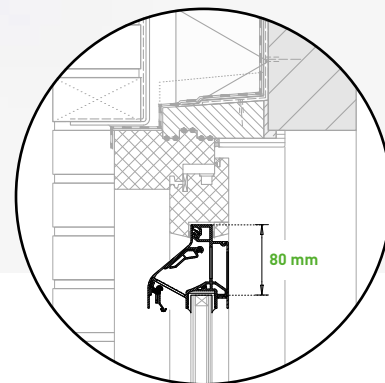

Fitting over the **glass**

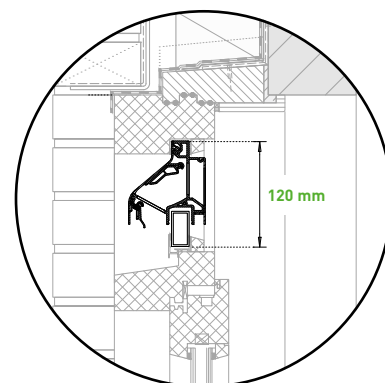

Transom mounting

Duco**Line** 80 SR

One window ventilator, three airflows

DucoLine 80 SR is a self-regulating flap window ventilator which supplies each room with optimal ventilation. The design of the inside boasts a completely flat inner grid. The choice of handle determines the ventilation capacity.


- One window ventilator, **three airflows**
- **Glass reduction 80** is superb
- Excellent **thermal performance**
- Completely **flat inner grid**
- Can be used with **any glass thickness** (up to 46 mm)

| | |
|--|---------|
| U-value | 2,81 |
| Wind tightness class closed position | Class 2 |
| Wind tightness closed position | 450 |
| Water tightness class closed position | E700 |
| Water tightness closed position | 700 |
| Glass reduction | 80 mm |


Standards: consult the table on page 40.



→ DucoLine 80 SR fitting over the glass

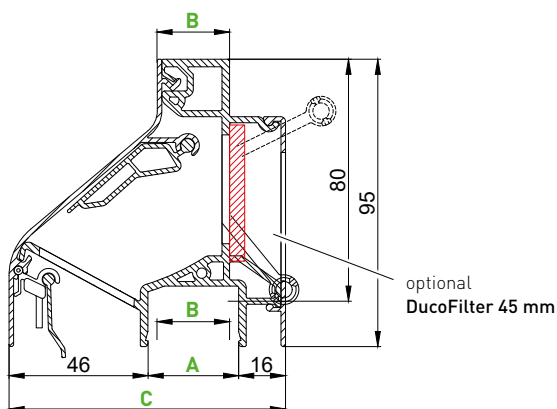

→ DucoLine 80 SR transom mounting

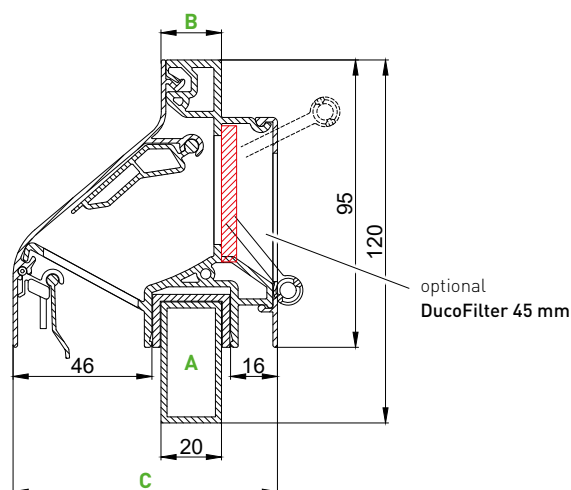

VERSIONS WITH GLASS PROFILE

| | Dimensions (mm) | | | | | | |
|-----------------------------|-----------------|----|----|-----|-----|-----|-----|
| Glass profile (A) | 26 | 30 | 34 | 38 | 42 | 48 | 52 |
| Glass thickness* (B) | 20 | 24 | 28 | 32 | 36 | 42 | 46 |
| Vent depth (C) | 88 | 92 | 96 | 100 | 104 | 110 | 114 |

* The specified glass thickness is applicable to [Duco] glazing rubber. When kitting, you should take a minimum of 4 mm and maximum of 8 mm difference between glass thickness and glass profile.

VERSIONS WITH TRANSOM PROFILE

| | Dimensions (mm) | |
|----------------------------|-----------------|---------|
| Transom profile (A) | 40 x 20 | 40 x 25 |
| Top section (B) | 20 | 24 |
| Vent depth (C) | 88 | 91 |

HANDLES

The choice of handle determines ventilation capacity.

| | | |
|--|--|---|
| <p>→ Handle DucoLine 30 / 10 Also available in longer length [DucoLine 50 / 10]</p> | <p>→ Handle DucoLine 30 / 17 Also available in longer length [DucoLine 50 / 17]</p> | <p>→ Handle 30 Also available in other lengths [see page 37]</p> |
|--|--|---|

→ Ventilation- and sound reduction performance



| Type DucoLine 80 SR | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption D _{n,e} , W (C; C _{tr})* in dB | |
|--------------------------------|----------------------------|------|-------|-----------------------------|-------|-------|----------------------------------|--------------------------------|--|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| Handle DucoLine 30 / 10 | 10,7 | 16,4 | 14,4 | 38,5 | 59 | 52 | 13615,8 | 10800 | 29 (-1;-2) | 33 (-1;-2) |
| Handle DucoLine 30 / 17 | 17,4 | 23,0 | 21,0 | 62,6 | 82,8 | 75,5 | 22141,5 | 19300 | 28 (-1;-2) | 33 (-1;-2) |
| Handle 30 | 22,6 | 29,6 | 27,4 | 81,4 | 106,7 | 98,5 | 28758,5 | 29500 | 26 (0;0) | 33 (-1;-2) |

For values with the DucoFilter, see the table on page 40.


* According to EN ISO 717



→ Dimensions & order information: see page 32 → Controls & ancillaries: see page 37
→ Full specifications: see page 40

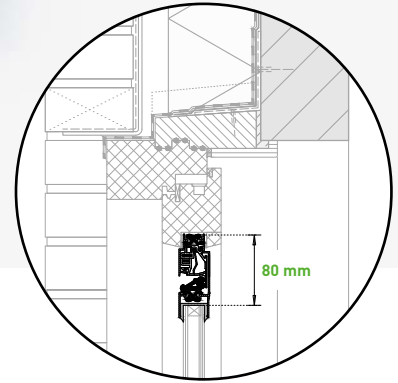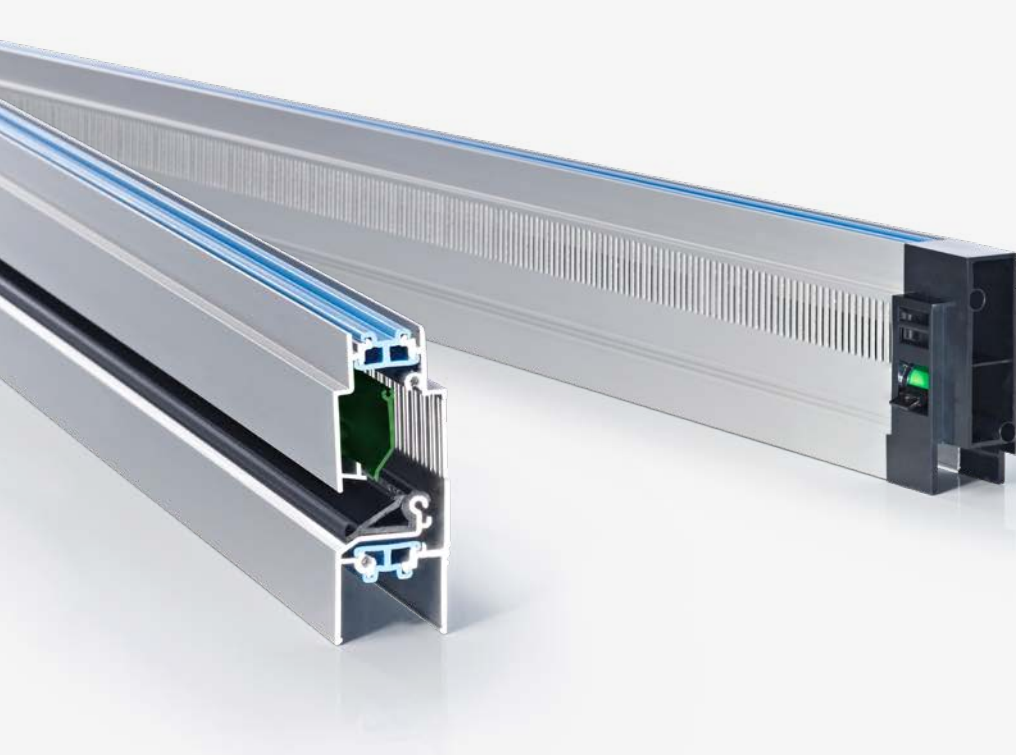

Fitting over the **glass**

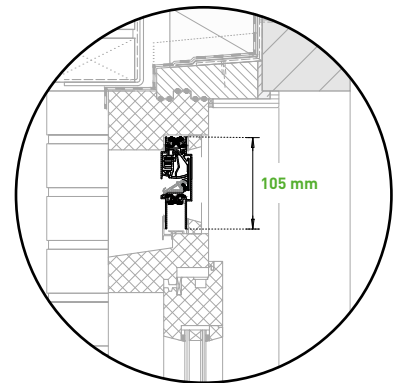

Transom mounting

DucoFlat 80 SR

Self-regulating flat vent

DucoFlat 80 SR series have been specifically engineered for integration in the fixed and sliding panes of a sliding window or a sliding door. The window ventilator features just 80 mm glass reduction.

REMARK: DucoFlat 80 SR is only applicable for (sliding) windows in low-rise buildings up to 15 m (= approx. 5 floors) and is always performed with the SR flap.


- Completely **flat vent**
- Suitable for installation in the **sliding and fixed panes of a sliding window** or sliding door
- **Glass reduction 80** is superb

| | |
|--|---------|
| U-value | 3 |
| Wind tightness class closed position | Class 3 |
| Wind tightness closed position | 650 |
| Water tightness class closed position | 5A |
| Water tightness closed position | 200 |
| Glass reduction | 80 mm |


Standards: consult the table on page 40.



→ DucoFlat 80 SR fitting over the glass

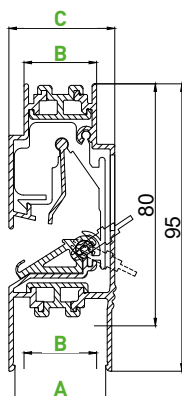

→ DucoFlat 80 SR transom mounting

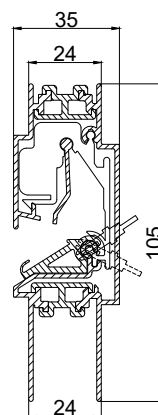


VERSIONS WITH GLASS PROFILE

| Glass profile (A) | Dimensions (mm) | | |
|----------------------|-----------------|----|----|
| | | 30 | 34 |
| Glass thickness* (B) | 24 | 28 | 32 |
| Vent depth (C) | 35 | 39 | 43 |

* The specified glass thickness is applicable to (Duco) glazing rubber. When kitting, you should take a minimum of 4 mm and maximum of 8 mm difference between glass thickness and glass profile.

Example of glazed-in sliding doors

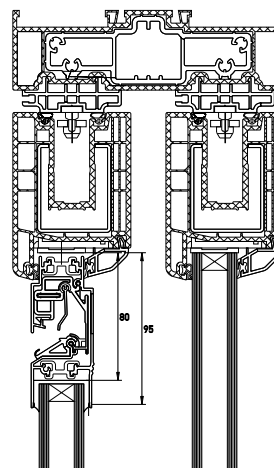


→ Ventilation- and sound reduction performance

| Type | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption $D_{n,e}, W(C;C_u)^*$ in dB | |
|------|----------------------------|------|-------|-----------------------------|------|-------|----------------------------------|--------------------------------|--|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| | DucoFlat 80 SR | 11,5 | 13,8 | 19,0 | 41,4 | 49,7 | | | 68,3 | 14685 |

* According to EN ISO 717



→ Dimensions & order information: see page 32 → Controls & ancillaries: see page 37
 → Full specifications: see page 40



DucoStrip

Aluminium slot ventilators

DucoStrip is an aluminium “through-the-frame” slot ventilator. The combination of its attractive design with integrated end caps and high-quality polyester powder coating makes DucoStrip the preferred choice for any type of window frame.

NOTE: DucoStrip is only suitable for windows in low-rise buildings (up to second floor).


- Smooth and slim with **minimal projection**
- Incoming airflow deflected **upwards**
- Installation screws concealed by **smooth end caps**

| | |
|--|---------|
| Wind tightness class closed position | Class 2 |
| Wind tightness closed position | 300 |
| Water tightness class closed position | 5A |
| Water tightness closed position | 200 |


Standards: consult the table on page 40.



→ DucoStrip canopy & **Slimline** stripvent

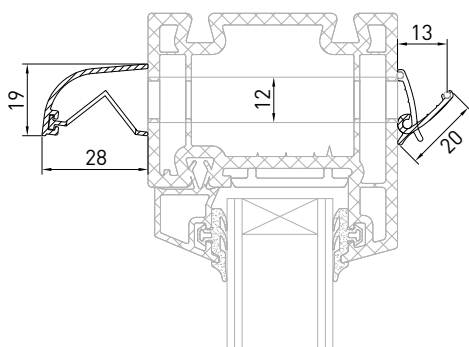

→ DucoStrip canopy & **Wideline** stripvent

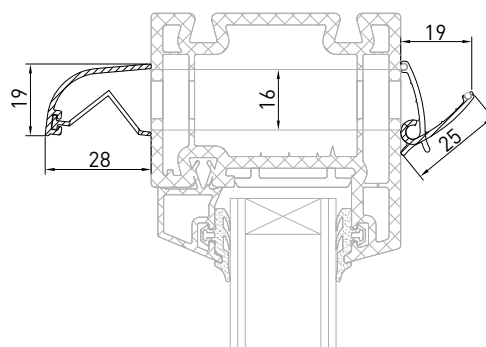


| Type | Vent length in mm | Slot height in mm |
|----------|----------------------|----------------------|
| Slimline | 290 | 12 |
| Wideline | 460 | 16 |

→ Ventilation- and sound reduction performance

| Type DucoStrip | Airflow (Q) in l/s at... | | | Airflow (Q) in m³/h at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption D _{n,e} , W (C; C _v)* in dB | |
|-------------------|-----------------------------|------|-------|------------------------------|------|-------|---|--------------------------------------|---|--------------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| Slimline | 2,0 | 2,9 | 6,6 | 7,3 | 10,4 | 23,8 | 2605 | 3000 | 32 [-1;0] | 36 [-1;-1] |
| Wideline | 4,1 | 5,8 | 12,6 | 14,8 | 20,9 | 45,4 | 5283 | 6500 | 28 [0;1] | 35 [-1;-2] |

* According to EN ISO 717

Independently
tested by
BRE

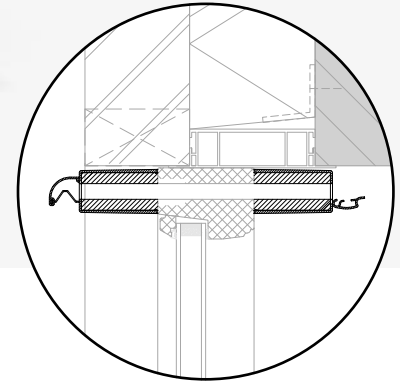

Fitting **through the frame**

DucoStrip Acoustic

Sound absorbing aluminium slot ventilator

DucoStrip is a sound absorbing aluminium “through-the-frame” slot ventilator. The sound-absorbing module can be fitted either on the inside or the outside, or both sides for even better sound absorption.

NOTE: DucoStrip Acoustic is only suitable for windows in low-rise buildings (up to second floor).

- Sound absorption **inside, outside or both sides**
- Incoming airflow deflected **upwards**
- **Simple fitting** with two screws per module
- Installation screws concealed by **smooth end caps**



Double Acoustic



Acoustic **Inside**




Acoustic **Outside**

| | |
|--|---------|
| Wind tightness class closed position | Class 2 |
| Wind tightness closed position | 300 |
| Water tightness class closed position | 9A |
| Water tightness closed position | 600 |


Standards: consult the table on page 40.




→ DucoStrip Acoustic **Double Acoustic**

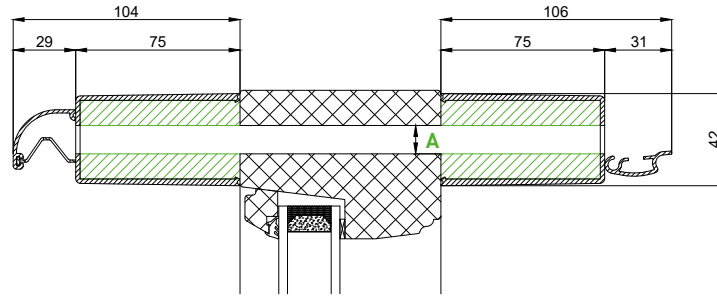



→ DucoStrip Acoustic **Acoustic Outside**

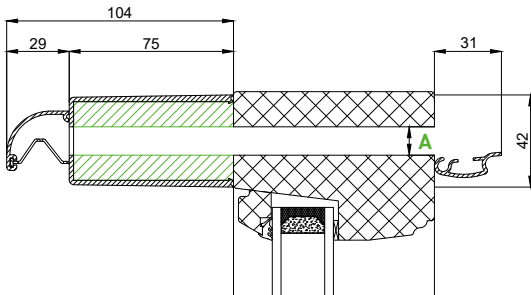

→ DucoStrip Acoustic **Acoustic Inside**

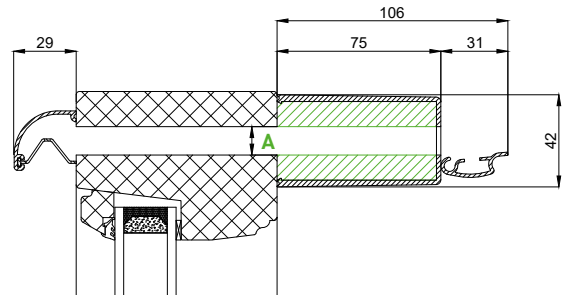

| Type | Vent length in mm | Slot length in mm | Slot height (A) in mm |
|-----------------------------------|----------------------|----------------------|--------------------------|
| DucoStrip Acoustic 2500 EA | 460 | 2 x 173,5 | 13 |
| DucoStrip Acoustic 5000 EA | 520 | 2 x 215 | 15 |

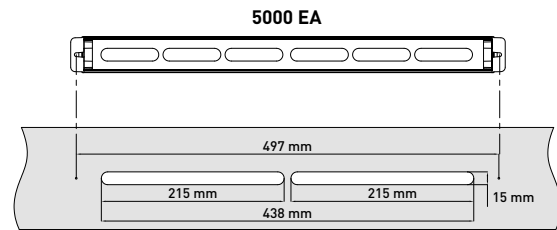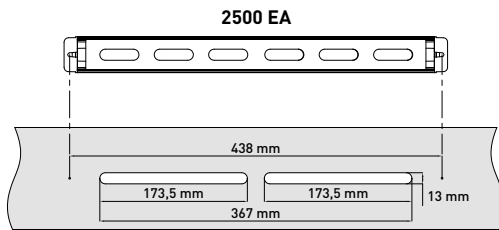



→ Ventilation- and sound reduction performance

| Type DucoStrip | Airflow (Q) in l/s at... | | | Airflow (Q) in m ³ /h at... | | | Equivalent area at 1 Pa in mm ² /m | Geometrical Free Area in mm ² /m | Sound absorption D _{n,e} , W (C _s ; C _{tr}) [*] in dB | | |
|-------------------|-----------------------------|-----------------|-------|---|------|-------|--|---|--|--------------------|------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position | |
| | 2500 EA | Double Acoustic | 2,5 | 3,5 | 8,0 | 9,0 | | | 12,6 | 28,8 | 3040 |
| Acoustic Inside | | 2,8 | 3,9 | 9,0 | 10,1 | 14,0 | 32,4 | 3346 | 4511 | 37 [0;0] | 57 [-1;-5] |
| Acoustic Outside | | 2,7 | 3,8 | 8,8 | 9,7 | 13,7 | 31,7 | 3543 | 4511 | 37 [0;0] | 54 [-1;-4] |
| 5000 EA | Double Acoustic | 3,9 | 5,6 | 12,7 | 14,0 | 20,2 | 45,7 | 5046 | 6450 | 37 [-1;-2] | 53 [-1;-4] |
| | Acoustic Inside | 4,2 | 5,9 | 13,2 | 15,1 | 21,2 | 47,5 | 5263 | 6450 | 34 [0;-1] | 51 [-1;-3] |
| | Acoustic Outside | 4,2 | 6,1 | 13,8 | 15,1 | 22,0 | 49,7 | 5394 | 6450 | 34 [0;0] | 51 [-1;-3] |

* According to EN ISO 717



→ Ordering info: see page 32
→ Full specifications: see page 42

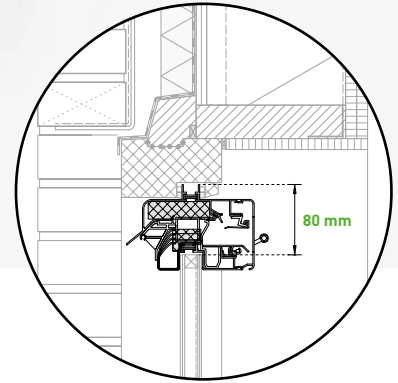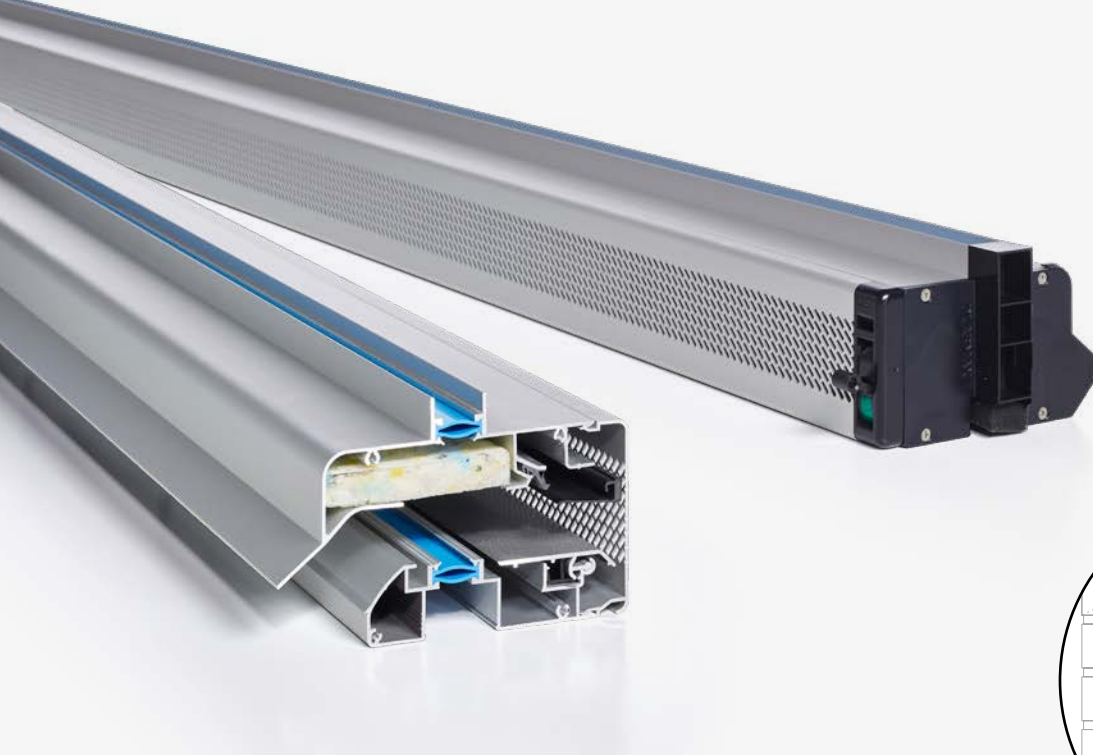


Fitting over the **glass**

GlasMax SR


Compact acoustic ventilator

GlasMax SR is a sound-absorbing window ventilator that has been developed for fitting over the glass, transom mounting and compact transom mounting. The acoustic ventilator is eminently suitable for use in situations where light noise exposure is an issue.

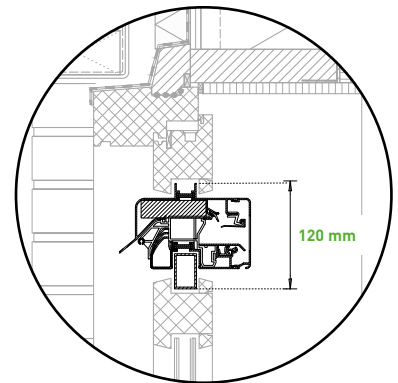

Transom mounting

- Window ventilator with **sustainable sound-absorbing material**
- Sound-absorbing material helps prevent **complaints due to allergies**
- Suited to **high-rise** applications (up to 40 m* height)
- **Glass reduction 80** is superb
- Four **different air flow** rates

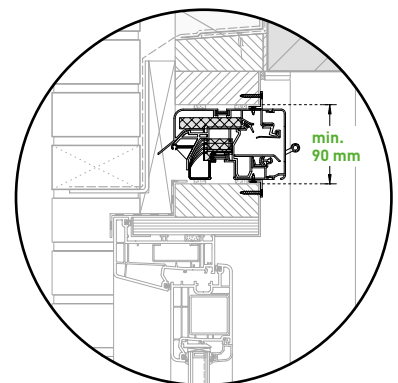

On top of the window frame


| | |
|--|---------|
| U-value | 1,56 |
| Wind tightness class closed position | Class 3 |
| Wind tightness closed position | 600 |
| Water tightness class closed position | E1050 |
| Water tightness closed position | 1050 |
| Glass reduction | 80 mm |

Standards: consult the table on page 40.




* A maximum installation height of 20 m is applicable when a window ventilator with air slot 20 and 25 is installed in sight.

→ GlasMax SR
fitting over the glass

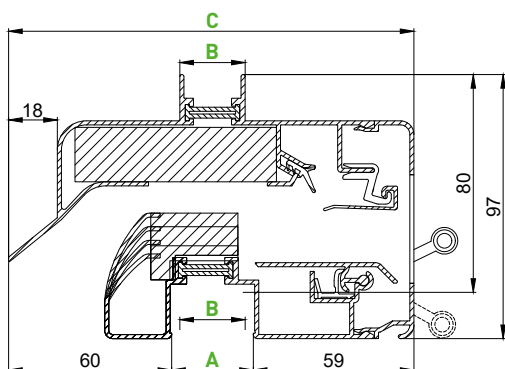

→ GlasMax SR
transom mounting

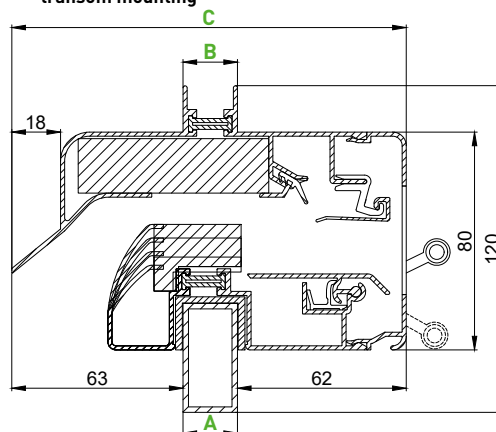

VERSIONS WITH GLASS PROFILE


| | Dimensions (mm) | | | |
|-----------------------------|-----------------|-----|-----|-----|
| Glass profile (A) | 26 | 30 | 34 | 38 |
| Glass thickness* (B) | 20 | 24 | 28 | 32 |
| Vent depth (C) | 145 | 149 | 153 | 157 |

* The specified glass thickness is applicable to [Duco] glazing rubber. When kitting, you should take a minimum of 4 mm and maximum of 8 mm difference between glass thickness and glass profile.

VERSIONS WITH TRANSOM PROFILE

| | Dimensions (mm) | |
|----------------------------|-----------------|---------|
| Transom profile (A) | 40 x 20 | 40 x 25 |
| Top section (B) | 20 | 24 |
| Vent depth (C) | 145 | 149 |

→ GlasMax SR
compact transom mounting

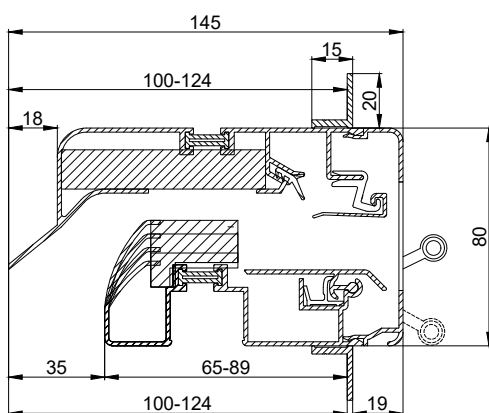


→ Ventilation- and sound reduction performance

| Type GlasMax | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption D _{n,e} , W (C; C _u)' in dB | |
|-----------------|----------------------------|------|-------|-----------------------------|-------|-------|----------------------------------|--------------------------------|---|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| Air slot 10 mm | 15,9 | 18,2 | 16,8 | 57,2 | 65,6 | 60,3 | 20233 | 10000 | 37 (-1;-3) | 50 (-1;-3) |
| Air slot 15 mm | 21,1 | 24,6 | 20,7 | 76,0 | 88,4 | 74,6 | 26850 | 15000 | 35 (-1;-2) | 51 (-1;-4) |
| Air slot 20 mm | 24,1 | 30,4 | 27,6 | 86,8 | 109,3 | 99,3 | 30667 | 20000 | 34 [0;-2] | 49 [0;-3] |
| Air slot 25 mm | 28,6 | 34,4 | 29,3 | 103,0 | 123,9 | 105,3 | 36394 | 25000 | 27 [0;-1] | 42 [0;-1] |


* According to EN ISO 717




→ Dimensions & order information: see page 32 → Controls & ancillaries: see page 37
→ Full specifications: see page 42

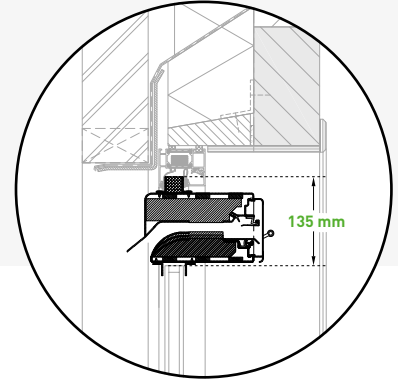

Fitting over the **glass**

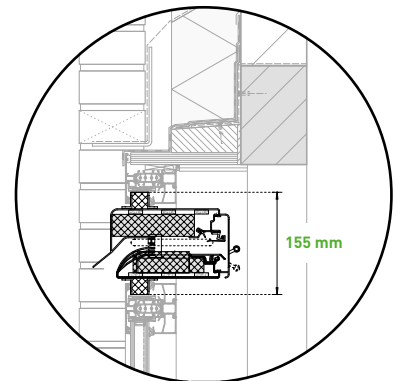

Transom mounting

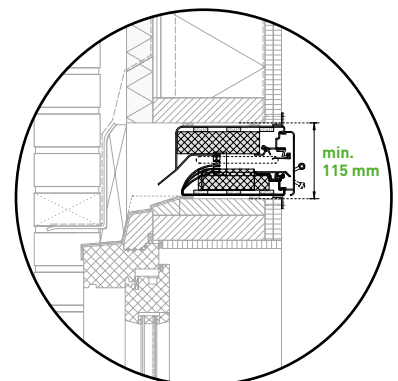

Compact transom mounting

Duco**Max** SR Sky**Max** SR

Superior sound absorption
and/or high-rise applications

DucoMax SR is a self regulating, acoustic vent (sound attenuating ventilator), specifically engineered for situations exposed to high levels of noise disturbance. The various types are attractively designed and offer excellent acoustic and airflow performance. The **SkyMax SR** is an upgraded version of the DucoMax SR making it applicable to heights up to 70 meter.

Specific fitting instructions apply to SkyMax SR series vents.
These instructions are available at Duco or at your local dealer.

- Suited to **high-rise applications**
- **Four fitting depths:** Corto, Medio, Alto, Largo
- Suited to situations giving rise to **high levels of noise disturbance**
- **No whistling sounds** with positive or negative pressure thanks to active closing aluminium valve
- **Excellent wind and waterproofing**


| | |
|---------------------------------------|---------|
| U-value | 2,58 |
| Wind tightness class closed position | Class 2 |
| Wind tightness closed position | 600 |
| Water tightness class closed position | E1050 |
| Water tightness closed position | 1050 |
| Glass reduction | 135 mm |

Standards: consult the table on page 40.



up to
40 m
DUCOMAX

up to
70 m
SKYMAX

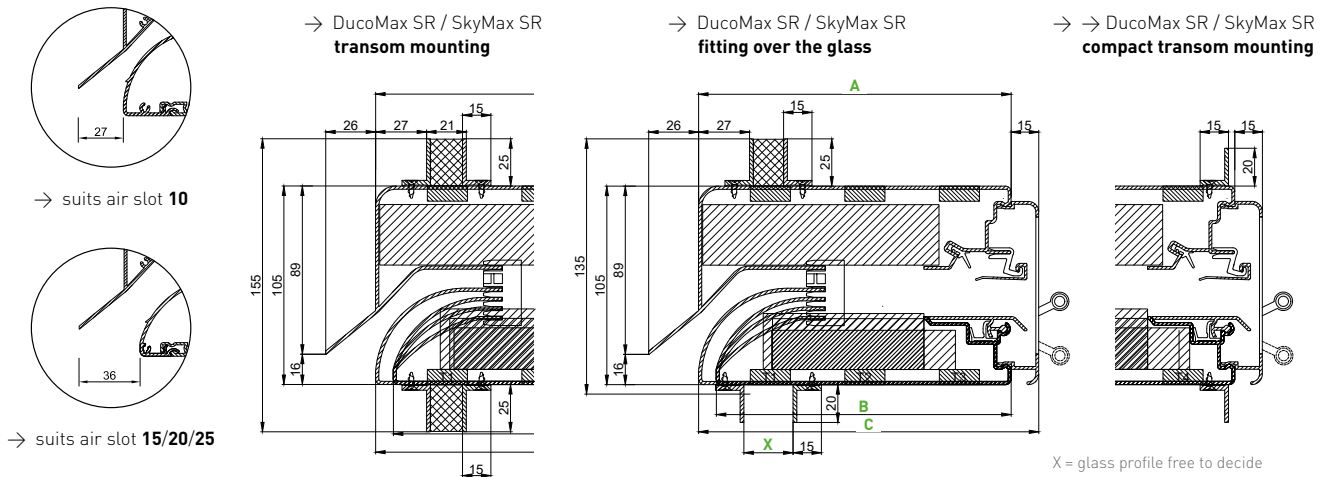



FITTING DEPTHS

| Version | Dimension A [see drawing] | Dimension B [see drawing] | Dimension C [see drawing] |
|--------------|------------------------------|------------------------------|------------------------------|
| Corto | 165 | 156 | 180 |
| Medio | 215 | 206 | 230 |
| Alto | 265 | 256 | 280 |
| Largo | 315 | 306 | 330 |

→ **Ventilation- and sound reduction performance**

| Type DucuMax | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption $D_{n,e}, W(C;C_u)^*$ in dB | |
|-----------------|----------------------------|------|-------|-----------------------------|-------|-------|----------------------------------|--------------------------------|--|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| Corto 10 | 13 | 24,1 | 20,2 | 46,8 | 86,7 | 72,8 | 16542 | 10000 | 41 (-1;-2) | 57 (-2;-4) |
| Corto 15 | 20,7 | 25,7 | 22,4 | 74,5 | 92,5 | 80,8 | 26341 | 15000 | 38 (-1;-3) | 55 (-2;-4) |
| Corto 20 | 26,9 | 39,3 | 35,3 | 96,8 | 141,5 | 127,1 | 34230 | 20000 | 36 (-1;-2) | 54 (-2;-3) |
| Corto 25 | 32 | 42,5 | 30,4 | 115,2 | 152,9 | 109,3 | 40720 | 25000 | 35 (-1;-2) | 53 (-1;-2) |
| Medio 10 | 11,2 | 24,1 | 20,2 | 40,3 | 86,7 | 72,8 | 14252 | 10000 | 44 (-1;-4) | 58 (-2;-5) |
| Medio 15 | 17,7 | 25,7 | 22,4 | 63,7 | 92,5 | 80,8 | 22523 | 15000 | 40 (-1;-4) | 57 (-2;-5) |
| Medio 20 | 25,6 | 39,3 | 35,3 | 92,2 | 141,5 | 127,1 | 32576 | 20000 | 39 (-2;-4) | 55 (-2;-4) |
| Medio 25 | 30,8 | 42,5 | 30,4 | 110,9 | 152,9 | 109,3 | 39193 | 25000 | 37 (-1;-4) | 55 (-1;-4) |
| Alto 10 | 11,9 | 24,1 | 20,2 | 42,8 | 86,7 | 72,8 | 15143 | 10000 | 46 (-2;-6) | 60 (-2;-6) |
| Alto 15 | 17,5 | 25,7 | 22,4 | 63,0 | 92,5 | 80,8 | 22269 | 15000 | 42 (-1;-5) | 58 (-2;-5) |
| Alto 20 | 26,3 | 39,3 | 35,3 | 94,7 | 141,5 | 127,1 | 33467 | 20000 | 40 (-1;-4) | 57 (-2;-6) |
| Alto 25 | 29,7 | 42,5 | 30,4 | 106,9 | 152,9 | 109,3 | 37793 | 25000 | 38 (-1;-4) | 56 (-2;-5) |
| Largo 10 | 11,9 | 24,1 | 20,2 | 42,8 | 86,7 | 72,8 | 15143 | 10000 | 49 (-1;-5) | 62 (-2;-5) |
| Largo 15 | 17,9 | 25,7 | 22,4 | 64,4 | 92,5 | 80,8 | 22778 | 15000 | 43 (-1;-4) | 60 (-1;-5) |
| Largo 20 | 26,9 | 39,3 | 35,3 | 96,8 | 141,5 | 127,1 | 34230 | 20000 | 41 (-2;-4) | 57 (-1;-5) |
| Largo 25 | 28,9 | 42,5 | 30,4 | 104,0 | 152,9 | 109,3 | 36775 | 25000 | 38 (-1;-3) | 55 (-1;-4) |

* According to EN ISO 717

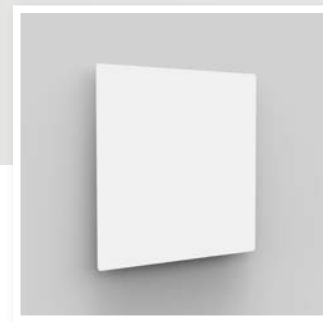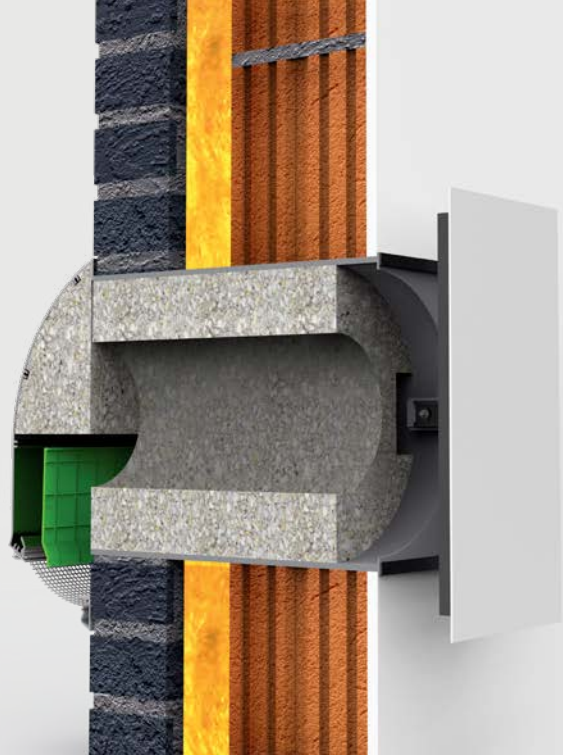

Silenzio SR (AK) Silenzio **Retro** SR


Design wall damper

The completely updated **Silenzio SR (AK)** is a wall damper that is eminently suitable for use in refurbishment. Not only has its appearance been given a complete makeover, but from now on the Silenzio also features a SR valve so it can easily be used in one of our ventilation systems. This sound-absorbing ventilator has been developed specifically for situations where high noise levels are an issue.

Silenzio **Retro** SR

The Silenzio Retro SR has been developed specifically for listed buildings with a protected façade. This ventilator can be built into the façade invisibly or be fitted with a discreet rosette part.

- **SR-flap** for use within Duco's ventilation systems
- 'AK' **acoustic damping** until 48 dB
- Simple solution for **renovation projects**
- **Aesthetic** adjustable inner grid

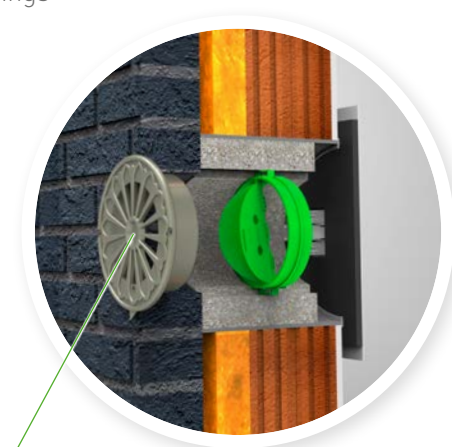


| | |
|--|---------|
| U-value | 4,76 |
| Wind tightness class closed position | Class 2 |
| Wind tightness closed position | 300 |
| Water tightness class closed position | 9A |
| Water tightness closed position | 600 |

Standards: consult the table on page 40.


Duco outside cap, outside part of your choice or open vertical joint



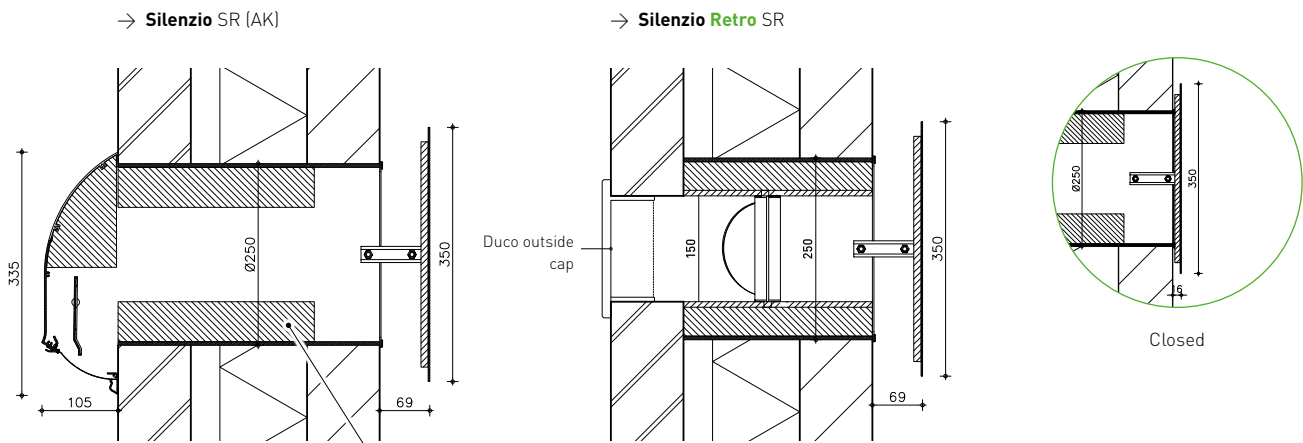


The Silenzio SR **AK** is equipped with extra sound absorbing material.


→ Outside cap Silenzio SR (AK)

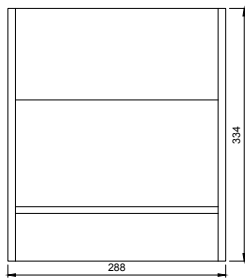

→ Inside cover

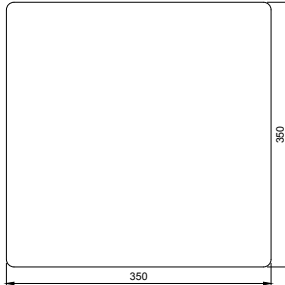

→ Duco outside cap Silenzio Retro SR

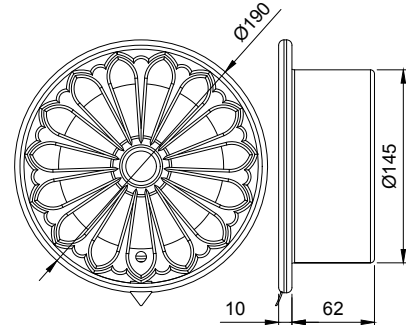

→ General specification

| Property | Silenzio SR (AK) | Silenzio Retro SR |
|-------------|--|--|
| Outer part | outside cap included | optional with Duco outside cap (RAL 7048 pearl mouse grey) |
| Tube length | 300 mm (suitable for wall thicknesses of 250 mm and over) longer version available as an option | |

→ Ventilation- and sound reduction performance


| Type | Airflow (Q) in l/s/m at... | | | Airflow (Q) in m³/h/m at... | | | Equivalent area at 1 Pa in mm²/m | Geometrical Free Area in mm²/m | Sound absorption $D_{n,e}, W(C;C_u)^*$ in dB | |
|---|----------------------------|------|-------|-----------------------------|------|-------|----------------------------------|--------------------------------|--|-----------------|
| | 1 Pa | 2 Pa | 10 Pa | 1 Pa | 2 Pa | 10 Pa | | | OPEN position | CLOSED position |
| Silenzio SR | 16,6 | 16,5 | 16,4 | 59,8 | 59,4 | 59,1 | 21060 | 17600 | 39 [-1;-4] | 50 [-2;-5] |
| Silenzio SR AK | 9,0 | 10,1 | 10,3 | 32,4 | 36,4 | 37,1 | 11478 | 17600 | 48 [-1;-4] | 61 [-1;-6] |
| Silenzio Retro SR** without Duco outside cap | 10,7** | 15,2 | 10,1 | 38,5 | 54,7 | 36,4 | 13616 | 17600 | 43 [-1;-3] | 64 [-3;-10] |
| Silenzio Retro SR with Duco outside cap | 9,0 | 12,9 | 10,1 | 32,4 | 46,5 | 36,4 | 11453 | 11500 | 43 [-1;-3] | 64 [-3;-10] |

* According to EN ISO 717
** Measured without outside cap. Effective values depend on the outside part.



→ Dimensions & order information: see page 32 → Controls & ancillaries: see page 37
→ Full specifications: see page 42

DIMENSIONS AND ORDERING INFORMATION




Fitting over the **glass** & **transom** mounting

Calculating ventilator length

| | | Vent size = ORDER SIZE | Tolerance (mm) | Groove (mm) |
|--|---|---|-------------------|----------------|
| DucoPlus 45 | | tight slot size - 6 mm OR clear width + 30 mm | 3 | 18 |
| DucoPlus 60 DucoTon 80 SR DucoKlep 80 SR DucoFlat 80 SR | | tight slot size - 6 mm OR clear width + 28 mm | 3 | 17 |
| DucoLine 80 SR | STANDARD: with groove piece 17 mm | tight slot size - 6 mm OR clear width + 28 mm | 3 | 17 |
| GlasMax 'SR' | OPTION: with groove piece 25 mm* | tight slot size - 6 mm OR clear width + 44 mm | | 25 |
| DucoMax SR SkyMax SR | STANDARD: with groove piece 25 mm | tight slot size - 6 mm OR clear width + 44 mm | 3 | 25 |
| | OPTION: with groove piece 17 mm | tight slot size - 6 mm OR clear width + 28 mm | | 17 |
| | OPTION: groove free to determine | tight slot size - 6 mm | | free to decide |

* available from first quarter of 2021

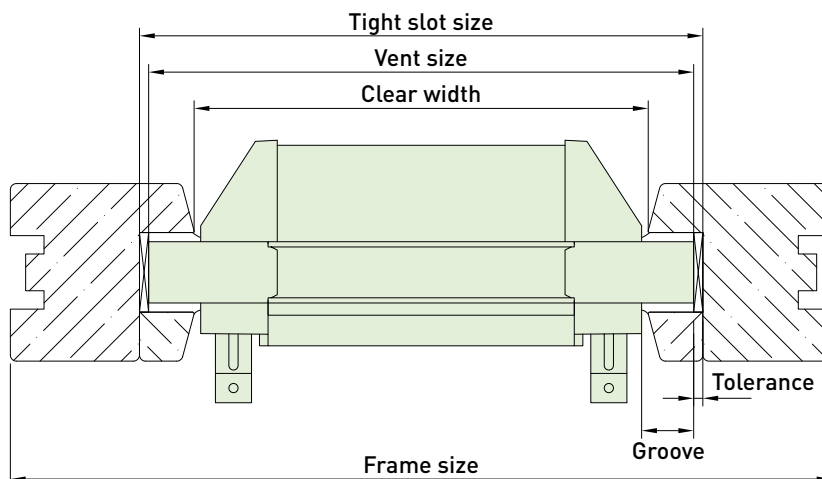

FITTING OVER THE GLASS: glass profiles and dimensions

| Product | Glass profile (mm) | | | | | | | | | | | | | Glass reduction (mm) | Vent height (mm) | Maximum length under warranty (mm) |
|-------------------------|--|----|----|----|----|----|----|----|----|----|----|----|-----|----------------------|------------------|------------------------------------|
| | 12 | 21 | 26 | 30 | 34 | 38 | 42 | 46 | 48 | 50 | 52 | 54 | | | | |
| DucoPlus 45 | | | | ✓ | ✓ | ✓ | | | | | | | | 45 | 60 | 2400 |
| DucoPlus 60 | | | ✓ | ✓ | ✓ | ✓ | | | | | | | | 60 | 75 | 2500 |
| DucoTon 80 SR | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | | | 80 | 94 | 2500 |
| DucoKlep 80 SR | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | | ✓ | 80 | 95 | 2500 |
| DucoLine 80 SR | | | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | | ✓ | | 80 | 95 | 2500 |
| DucoFlat 80 SR | | | | ✓ | ✓ | ✓ | | | | | | | | 80 | 95 | 2500 |
| GlasMax SR | | | ✓ | ✓ | ✓ | ✓ | | | | | | | | 80 | 97 | 2500 |
| DucoMax SR SkyMax SR | X = glass profile free to decide (all glass thicknesses) | | | | | | | | | | | | 135 | 150 | 2500 | |

GLAZING GASKETS

| Silicon-free glazing gasket | Glass profile (mm) | | | | | | | | | | | | |
|-----------------------------|--------------------|----|----|----|----|----|----|----|----|----|----|----|--|
| | 12 | 21 | 26 | 30 | 34 | 38 | 42 | 46 | 48 | 50 | 52 | 54 | |
| Single glass 12 | ✓ | | | | | | | | | | | | |
| 21 | | ✓ | | | | | | | | | | | |
| 26 - 34 | | | ✓ | ✓ | ✓ | | | | | | | | |
| 34 - 42 | | | | | ✓ | ✓ | ✓ | | | | | | |
| 46 - 54 | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | |

TRANSOM MOUNTING: transom profiles and dimensions


| Product | Transom profile (mm) | | | With transom section ... X ... (mm) | | Vent height (mm) | Maximum vent length under warranty (mm) |
|----------------|-------------------------------------|----|----|-------------------------------------|---------|------------------|---|
| | 20 | 21 | 24 | 40 x 20 | 40 x 25 | | |
| DucoTon 80 SR | | ✓ | | | | 104 | 2500 |
| DucoKlep 80 SR | ✓ | | | ✓ | | 105 | 2500 |
| DucoLine 80 SR | | | | | ✓ | 120 | 2500 |
| DucoFlat 80 SR | | | | ✓ | | 105 | 2500 |
| GlasMax SR | | | | | ✓ | 120 | 4000 |
| DucoMax SR | KX = Transom profile free to decide | | | | | 155 | 4000 |
| SkyMax SR | | | | | | 155 | 2500 |



Compact transom mounting

Dimensions

| | Vent size = ORDER SIZE | Tolerance (mm) | Flange (mm) | Built-in height (mm) | Vent height (mm) | Maximum vent length under warranty (mm) |
|-------------------|---------------------------|-------------------|----------------|-------------------------|---------------------|--|
| GlasMax SR | clear width + 30 mm | 5 | 20 | 90 | 120 | 4000 |
| DucoMax SR | | | | 115 | 145 | 4000 |
| SkyMax SR | | | | 115 | 145 | 2500 |

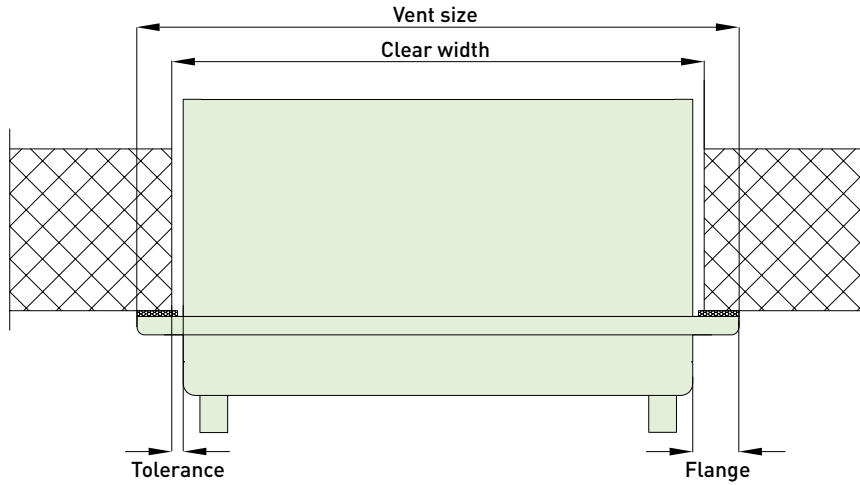


Determining dimension X


For compact transom mounting of **GlasMax SR**, **DucoMax SR** or **SkyMax SR** on the window frame, it is important to state the correct position of the L section. It is determined correctly by measuring the distance between nose of the acoustic window ventilators and the beginning of the L section. This is known as dimension X and is expressed in mm. **GlasMax SR**, **DucoMax SR** or **SkyMax SR** feature plastic side pieces as standard for compact transom mounting.

→ **DucoMax SR / SkyMax SR**

| Thermal interruption | Minimum distance to the outer front (mm) | Minimum distance to the front of the case (mm) | Case depth | Maximum distance to the outer front (mm) | Maximum distance to the front of the case (mm) |
|----------------------|--|--|------------|--|--|
| T1 | 87 | 61 | Corto | 187 | 161 |
| T2 | 137 | 111 | Medio | 237 | 211 |
| T3 | 187 | 161 | Alto | 287 | 261 |
| T4 | 237 | 211 | Largo | 337 | 311 |
| T5 | 287 | 261 | | | |
| T6 | 337 | 311 | | | |

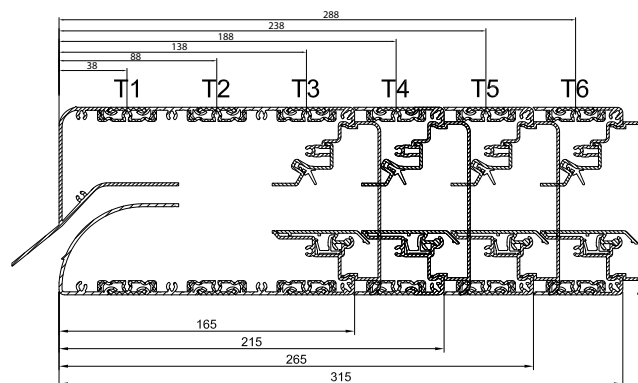

→ **GlasMax SR**

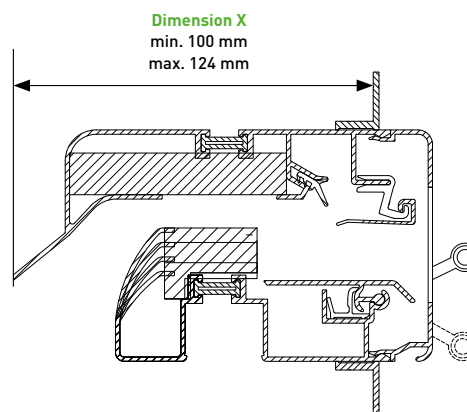




On **top** of the window frame

Dimensions

| | Vent size = ORDER SIZE | Built-in height (mm) | Vent height (mm) | Tolerance (mm) | Maximum vent length under warranty (mm) |
|----------------------|-----------------------------------|---------------------------------|-----------------------------|---------------------------|--|
| DucoTop 60 SR | frame size | 65 | 60 | 5 | 3500 |

DucoTop 60 SR

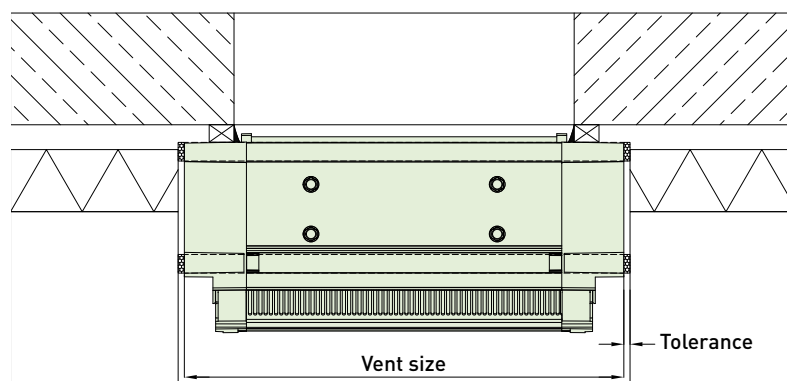

ORDERING INFO







































Order forms are available on request.
 Please contact Duco 'Ventilation & Sun Control' for further information.
 Tel.: 0032-58 33 00 33 - Fax: 0032-58 33 00 44 - E-mail: info@duco.eu



































CONTROLS & ANCILLARIES

CONTROLS

→ Handles

| Type | Description | Oder no. |
|---|----------------|--|
|  | Handle 10 | WHITE  1377 |
| | | CREAM  1464 |
| | | GREY  1378 |
| | | BLACK  1379 |
|  | Handle 15 | WHITE  1200 |
| | | CREAM  1469 |
| | | GREY  1201 |
| | | BLACK  1202 |
|  | Handle 30 | WHITE  1203 |
| | | CREAM  1481 |
| | | GREY  1204 |
| | | BLACK  1205 |
|  | Handle 40 | WHITE  1206 |
| | | CREAM  1482 |
| | | GREY  1207 |
| | | BLACK  1208 |
|  | Handle 50 | WHITE  1209 |
| | | CREAM  1483 |
| | | GREY  1210 |
| | | BLACK  1211 |
|  | Handle 60 | WHITE  1212 |
| | | CREAM  1484 |
| | | GREY  1213 |
| | | BLACK  1214 |
|  | Handle 70 | WHITE  1215 |
| | | CREAM  1485 |
| | | GREY  1216 |
| | | BLACK  1217 |
|  | Flap Handle 15 | WHITE  1468 |
| | | BLACK  1436 |





| Type | Description | Oder no. |
|--|----------------------------|--|
|  | Short Thumb Handle | BLACK  13001 |
|  | Long Thumb Handle | BLACK  13011 |
|  | Curved Handle 15 | WHITE  1269 |
| | | BLACK  1268 |
|  | Curved Handle 50 | WHITE  1257 |
| | | CREAM  1495 |
| | | GREY  1258 |
| | | BLACK  1259 |
|  | Handle DucoLine 30 / 10 | WHITE  2403 |
| | | CREAM  2406 |
| | | GREY  2405 |
| | | BLACK  2404 |
|  | Handle DucoLine 30 / 17 | WHITE  2407 |
| | | CREAM  2410 |
| | | GREY  2409 |
| | | BLACK  2408 |
|  | Handle DucoLine 50 / 10 | WHITE  2602 |
| | | CREAM  2604 |
| | | GREY  2603 |
| | | BLACK  2601 |
|  | Handle DucoLine 50 / 17 | WHITE  2606 |
| | | CREAM  2608 |
| | | GREY  2607 |
| | | BLACK  2605 |

STANDARD HANDLES







| | |
|--|-----------|
| DucoFlat 80 SR | Handle 10 |
| DucoPlus 45 | Handle 15 |
| DucoPlus 60 | |
| DucoTon 80 SR | |
| DucoKlep 80 SR | Handle 40 |
| • glass thickness 20, 24, 28 and 32 mm | Handle 50 |
| • glass thickness 36 mm | Handle 60 |
| • glass thickness 40, 44 and 48 mm | Handle 70 |

| | |
|--------------------------|-------------------------|
| DucoLine 80 SR | Handle 30 |
| | Handle DucoLine 30 / 17 |
| | Handle DucoLine 30 / 10 |
| GlasMax SR | Flap Handle 15 |
| DucoMax SR | |
| SkyMax SR | |
| Silenzio (Retro) SR (AK) | |
| DucoTop 60 SR | Manual |
| DucoStrip | |
| DucoStrip Acoustic | |





→ Handle extension & rod straight linkage

| Type | Description | Oder no. |
|---|----------------------|---|
|  | Handle extension 35 | WHITE <input type="checkbox"/> 1236 CREAM <input type="checkbox"/> 1496 GREY <input type="checkbox"/> 1237 BLACK <input type="checkbox"/> 1238 |
|  | Handle extension 60 | WHITE <input type="checkbox"/> 1239 CREAM <input type="checkbox"/> 1497 GREY <input type="checkbox"/> 1240 BLACK <input type="checkbox"/> 1241 |
|  | Handle extension 85 | BLACK <input type="checkbox"/> 171 |
|  | Rod straight linkage | WHITE <input type="checkbox"/> 1270 CREAM <input type="checkbox"/> 1493 GREY <input type="checkbox"/> 1271 BLACK <input type="checkbox"/> 1272 |

→ Angled linkage







| Type | Description | Oder no. |
|---|-------------------|---|
|  | Angled linkage 20 | WHITE <input type="checkbox"/> 1218 CREAM <input type="checkbox"/> 1486 GREY <input type="checkbox"/> 1219 BLACK <input type="checkbox"/> 1220 |
|  | Angled linkage 30 | WHITE <input type="checkbox"/> 1221 CREAM <input type="checkbox"/> 1487 GREY <input type="checkbox"/> 1222 BLACK <input type="checkbox"/> 1223 |
|  | Angled linkage 40 | WHITE <input type="checkbox"/> 1224 CREAM <input type="checkbox"/> 1488 GREY <input type="checkbox"/> 1225 BLACK <input type="checkbox"/> 1226 |
|  | Angled linkage 50 | WHITE <input type="checkbox"/> 1227 CREAM <input type="checkbox"/> 1489 GREY <input type="checkbox"/> 1228 BLACK <input type="checkbox"/> 1229 |
|  | Angled linkage 60 | WHITE <input type="checkbox"/> 1230 CREAM <input type="checkbox"/> 1490 GREY <input type="checkbox"/> 1231 BLACK <input type="checkbox"/> 1232 |
|  | Angled linkage 70 | WHITE <input type="checkbox"/> 1233 CREAM <input type="checkbox"/> 1491 GREY <input type="checkbox"/> 1234 BLACK <input type="checkbox"/> 1235 |

→ Miscellaneous



| Type | Description | Oder no. |
|---|----------------------|---|
|  | Vertical rod guide | WHITE <input type="checkbox"/> 1242 CREAM <input type="checkbox"/> 1492 GREY <input type="checkbox"/> 1243 BLACK <input type="checkbox"/> 1244 |
|  | Cord endpiece | WHITE <input type="checkbox"/> 1275 |
|  | Rod endcap | BLACK <input type="checkbox"/> 1247 |
|  | Mobile rod operation | WHITE <input type="checkbox"/> 1621 CREAM <input type="checkbox"/> 1624 GREY <input type="checkbox"/> 1622 BLACK <input type="checkbox"/> 1620 |

ANCILLARIES



→ Glazing gasket

| Type | Description | Oder no. |
|---|---|----------|
|  | Glazing gasket for glass thickness 6 mm | 1856 |
|  | Glazing gasket for glass thickness 15 mm | 1857 |
|  | Glazing gasket for glass thickness 20-28 mm | 1859 |
|  | Glazing gasket for glass thickness 28-36 mm | 1861 |
|  | Glazing gasket for glass thickness 40-48 mm | 1900 |
|  | Glazing gasket for glass thickness 46-54 mm | 1890 |


→ Transom sections for transom mounting

| Type | Description | Oder no. |
|---|-------------------------------|----------|
|  | Transom section 40 x 20 Black | 23190 |
|  | Transom section 40 x 25 Black | 23189 |

→ DucoFilter

| Type | Description | Oder no. |
|---|--|----------|
|  | DucoFilter 29 mm for DucoTop 60 SR | 21085 |
|  | DucoFilter 45 mm for DucoTon 80 SR, DucoLine 80 SR and DucoKlep 80 SR | 21083 |

→ Channel expansion 17>25 mm
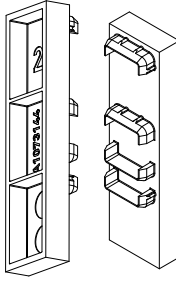
| Type | Description | Oder no. |
|--|-----------------------------------|----------|
|  | Channel extension piece for GG 26 | 2480 |
| | Channel extension piece for GG 30 | 2481 |
| | Channel extension piece for GG 34 | 2482 |
| | Channel extension piece for GG 38 | 2483 |
| | Channel extension piece for GG 42 | 2484 |
| | Channel extension piece for GG 48 | 2485 |
| | Channel extension piece for GG 52 | 2486 |

Available as from first quarter 2021

TECHNICAL SPECIFICATIONS

| | | |
|----------------------------------|-------------------------------------|--------------------------------------|
| DucoTop 60 SR see p. 8 | DucoTop 60 SR AK see p. 8 | DucoTop 60 SR AK+ see p. 8 |
|----------------------------------|-------------------------------------|--------------------------------------|




→ Ventilation values

| Property | | Regulation | Unit | Corto | Basso | Medio | Alto | Largo | Grando | Corto | Basso | Medio | Alto | Largo | Grando | Corto | Basso | Medio | Alto | Largo | Grando | |
|--|----------|------------|--------|---------|-------|-------|-------|-------|--------|---------|-------|-------|-------|-------|--------|---------|-------|-------|-------|-------|--------|------|
| Airflow (Q) without DucoFilter | at 1 Pa | EN 13141-1 | l/s/m | 12,9 | 12,9 | 12,6 | 12,8 | 13,0 | 12,8 | 13,5 | 13,3 | 13,0 | 13,1 | 12,9 | 12,6 | 8,9 | 8,3 | 8,1 | 8,1 | 7,7 | 7,9 | |
| | at 2 Pa | | | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 17,9 | 12,3 | 12,3 | 12,3 | 12,3 | 12,3 | 12,3 |
| | at 10 Pa | | | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 13,8 | 14,9 | 14,9 | 14,9 | 14,9 | 14,9 |
| | at 1 Pa | EN 13141-1 | m³/h/m | 46,4 | 46,4 | 45,4 | 46,1 | 46,8 | 46,1 | 48,6 | 47,9 | 46,8 | 47,2 | 46,4 | 45,4 | 32,0 | 29,9 | 29,2 | 29,2 | 27,7 | 28,4 | |
| | at 2 Pa | | | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 64,5 | 44,2 | 44,2 | 44,2 | 44,2 | 44,2 | 44,2 |
| | at 10 Pa | | | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 49,8 | 53,7 | 53,7 | 53,7 | 53,7 | 53,7 | 53,7 |
| Airflow (Q) with DucoFilter | at 1 Pa | EN 13141-1 | l/s/m | 11 | 11 | 10,7 | 10,9 | 11,1 | 10,9 | 11,5 | 11,3 | 11,1 | 11,1 | 11 | 10,7 | 7,6 | 7,1 | 6,9 | 6,9 | 6,5 | 6,7 | |
| | at 2 Pa | | | 15,2 | 15,2 | 15,2 | 15,2 | 15,2 | 15,2 | 15,2 | 15,2 | 15,2 | 15,2 | 15,2 | 15,2 | 12,4 | 10,4 | 10,4 | 10,4 | 10,4 | 10,4 | |
| | at 10 Pa | | | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 11,8 | 10,7 | 12,7 | 12,7 | 12,7 | 12,7 | 12,7 |
| | at 1 Pa | EN 13141-1 | m³/h/m | 39,6 | 39,6 | 38,5 | 39,2 | 40,0 | 39,2 | 41,4 | 40,7 | 40,0 | 40,0 | 39,6 | 38,5 | 27,4 | 25,6 | 24,8 | 24,8 | 23,4 | 24,1 | |
| | at 2 Pa | | | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 54,8 | 37,6 | 37,6 | 37,6 | 37,6 | 37,6 | 37,6 |
| | at 10 Pa | | | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 42,3 | 45,6 | 45,6 | 45,6 | 45,6 | 45,6 | 45,6 |
| Equivalent area at 1 Pa | | EN 13141-1 | mm²/m | 16415 | 16415 | 16034 | 16288 | 16543 | 16288 | 17179 | 16924 | 16543 | 16669 | 16415 | 16034 | 11325 | 10562 | 10307 | 10307 | 9798 | 10053 | |
| Geometrical Free Area | | EN 13141-1 | mm²/m | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | 19500 | |
| U-value | | EN 10077-2 | W/m²K | 1,80 | | | | | | 1,80 | | | | | | 1,80 | | | | | | |
| Self-regulating | | EN 13141-1 | | yes | | | | | | yes | | | | | | yes | | | | | | |
| Wind tightness class | | EN 12207 | Class | Class 3 | | | | | | Class 3 | | | | | | Class 3 | | | | | | |
| Wind tightness closed position | | EN 1026 | Pa | 650 | | | | | | 650 | | | | | | 650 | | | | | | |
| Water tightness class | | EN 12208 | Class | E650 | | | | | | E650 | | | | | | E650 | | | | | | |
| Water tightness closed position | | EN 1027 | Pa | 650 | | | | | | 650 | | | | | | 650 | | | | | | |


→ Sound reduction

| Property | | Regulation | Unit | Corto | Basso | Medio | Alto | Largo | Grando | Corto | Basso | Medio | Alto | Largo | Grando | Corto | Basso | Medio | Alto | Largo | Grando |
|---|--|------------|------|-------|-------|-------|------|-------|--------|-------|-------|-------|------|-------|--------|-------|-------|-------|------|-------|--------|
| D_{ne,W} open position | | EN ISO 717 | dB | 26 | 26 | 27 | 27 | 27 | 28 | 28 | 29 | 30 | 31 | 33 | 33 | 30 | 32 | 34 | 34 | 37 | 39 |
| C open position | | EN ISO 717 | dB | 0 | 0 | -1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | -1 | -1 | -1 | 0 | 0 | 0 | 0 | 0 |
| C_n open position | | EN ISO 717 | dB | -1 | -1 | -1 | -1 | -1 | -1 | -2 | -1 | -2 | -1 | -2 | -2 | -2 | -2 | -2 | -1 | -2 | -2 |
| D_{ne,W} closed position | | EN ISO 717 | dB | 47 | 46 | 49 | 45 | 50 | 48 | 45 | 48 | 50 | 53 | 53 | 54 | 50 | 53 | 55 | 54 | 55 | 55 |
| C closed position | | EN ISO 717 | dB | -1 | 0 | 0 | -1 | 0 | 0 | -1 | -1 | 0 | -1 | -1 | -1 | 0 | -1 | -1 | -1 | -1 | -1 |
| C_n closed position | | EN ISO 717 | dB | -2 | -1 | -1 | -3 | -1 | -2 | -2 | -2 | -2 | -4 | -4 | -4 | -2 | -3 | -4 | -4 | -4 | -4 |
| Octave band values | | | dB | | | | | | | | | | | | | | | | | | |
| at 125 Hz | | | dB | 29,9 | 30,3 | 30,5 | 30,4 | 30,3 | 31,2 | 31,5 | 32,2 | 32,4 | 33,3 | 33,9 | 33,8 | 33,2 | 34,4 | 34,7 | 35,0 | 35,9 | 36,8 |
| at 250 Hz | | | dB | 29,0 | 28,4 | 28,5 | 28,1 | 28,2 | 27,8 | 29,4 | 30,0 | 30,1 | 30,3 | 30,3 | 29,7 | 30,8 | 31,5 | 32,1 | 31,7 | 32,5 | 33,7 |
| at 500 Hz | | | dB | 22,4 | 22,9 | 23,5 | 23,4 | 24,0 | 24,3 | 23,1 | 23,8 | 24,2 | 25,5 | 26,3 | 26,5 | 24,7 | 26,3 | 28,1 | 29,2 | 31,1 | 32,4 |
| at 1000 Hz | | | dB | 24,3 | 24,7 | 25,7 | 26,5 | 26,2 | 26,7 | 25,9 | 27,6 | 28,9 | 30,7 | 31,7 | 31,6 | 27,6 | 30,4 | 32,8 | 33,1 | 36,5 | 38,8 |
| at 2000 Hz | | | dB | 29,8 | 27,7 | 27,7 | 28,5 | 28,7 | 29,4 | 34,2 | 34,9 | 35,7 | 38,0 | 41,1 | 39,4 | 36,3 | 40,9 | 43,0 | 41,9 | 47,9 | 49,3 |








→ General specification

| Property | | Regulation | Unit | Corto | Basso | Medio | Alto | Largo | Grando | Corto | Basso | Medio | Alto | Largo | Grando | Corto | Basso | Medio | Alto | Largo | Grando |
|---|--|------------|------|--|-------|-------|------|-------|--------|--|-------|-------|------|-------|--------|--|-------|-------|------|-------|--------|
| Finish | | | | DAR/Ral/Bi-Color | | | | | | DAR/Ral/Bi-Color | | | | | | DAR/Ral/Bi-Color | | | | | |
| Maximum drum- / flap length under warranty | | | mm | 2000 | | | | | | 2000 | | | | | | 2000 | | | | | |
| Standard control | | | | manual | | | | | | manual | | | | | | manual | | | | | |
| Split ventilation flap from vent length | | | mm | 2100 | | | | | | 2100 | | | | | | 2100 | | | | | |
| Endcap colours | | | |  + RAL colours | | | | | |  + RAL colours | | | | | |  + RAL colours | | | | | |

Endcap colours



BASIC VENTS

| DucoPlus 45 see p. 10 | DucoPlus 60 see p. 12 | DucoTon 80 SR see p. 14 | DucoKlep 80 SR see p. 16 | DucoLine 80 SR see p. 18 | | | DucoFlat 80 SR see p. 20 | DucoStrip see p. 22 | |
|--|---|---|---|---|--------------|-----------|---|---|----------|
| | | | | 10 | 17 | 23 | | Slimline | Wideline |
| 7,1 | 11,2 | 10,2 | 15,2 | 10,7 | 17,4 | 22,6 | 11,5 | 2,03 | 4,1 |
| 10,03 | 15,8 | 12,3 | 15,5 | 16,4 | 23,0 | 29,6 | 13,8 | 2,9 | 5,8 |
| 22,50 | 34,9 | 15,7 | 15,6 | 14,4 | 21,0 | 27,4 | 19,0 | 6,6 | 12,6 |
| 25,56 | 40,3 | 36,7 | 54,7 | 38,5 | 62,6 | 81,4 | 41,4 | 7,3 | 14,8 |
| 36,1 | 56,7 | 44,3 | 55,9 | 59 | 82,8 | 106,7 | 49,7 | 10,4 | 20,9 |
| 81,00 | 125,6 | 56,6 | 56,3 | 52 | 75,5 | 98,5 | 68,3 | 23,8 | 45,4 |
| n/a | n/a | 8,7 | 12,9 | 9,1 | 14,8 | 19,2 | n/a | n/a | n/a |
| n/a | n/a | 10,5 | 13,2 | 13,9 | 19,6 | 25,2 | n/a | n/a | n/a |
| n/a | n/a | 13,4 | 13,3 | 12,3 | 17,8 | 23,3 | n/a | n/a | n/a |
| n/a | n/a | 31,3 | 46,4 | 32,8 | 53,3 | 69,1 | n/a | n/a | n/a |
| n/a | n/a | 37,7 | 47,5 | 50,2 | 70,4 | 90,7 | n/a | n/a | n/a |
| n/a | n/a | 48,1 | 47,9 | 44,2 | 64,2 | 83,7 | n/a | n/a | n/a |
| 9008 | 14224 | 12976 | 19342 | 13615,8 | 22141,5 | 28758,5 | 14685 | 2581 | 5263 |
| 10000 | 15000 | 14400 | 19200 | 10800 | 19300 | 29500 | 15000 | 3000 | 6500 |
| 1,84 | 4,02 | 2,26 | 2,40 | 2,81 | | | 3,00 | - | |
| no | no | yes | yes | yes | | | yes | no | |
| Class 2 | Class 3 | Class 3 | Class 2 | Class 2 | | | Class 3 | Class 2 | |
| 450 | 650 | 650 | 450 | 450 | | | 650 | 300 | |
| E900 | E650 | 8A | E650 | E700 | | | 5A | 5A | |
| 900 | 650 | 450 | 650 | 700 | | | 200 | 200 | |
| | | | | | | | | | |
| | | | | 10 | 17 | 23 | | | |
| 25 | 25 | 27 | 25 | 29 | 28 | 26 | 27 | 32 | 28 |
| 0 | 0 | -1 | 0 | -1 | -1 | 0 | 0 | -1 | 0 |
| 0 | 0 | -1 | -1 | -2 | -2 | 0 | -1 | 0 | 1 |
| 41 | 39 | 34 | 37 | 33 | 33 | 33 | 44 | 36 | 35 |
| -1 | -1 | 0 | 0 | -1 | -1 | -1 | 0 | -1 | -1 |
| -2 | -1 | -1 | 0 | -2 | -2 | -2 | 0 | -1 | -2 |
| 25,5 | 27,8 | 25,9 | 24,2 | 26,4 | 24,7 | 23,9 | 27,2 | 32,0 | 31,3 |
| 29,1 | 27,1 | 28,4 | 25,6 | 28,4 | 27,4 | 26,9 | 27,3 | 41,1 | 36,5 |
| 28,3 | 26,2 | 26,9 | 24,9 | 29,5 | 28,5 | 28,1 | 24,3 | 37,0 | 32,7 |
| 25,7 | 27,0 | 25,6 | 23,3 | 24,7 | 24,7 | 24,5 | 25,6 | 32,7 | 27,7 |
| 23,1 | 26,7 | 27,6 | 25,7 | 29,4 | 28,3 | 26,3 | 27,3 | 29,7 | 27,0 |
| | | | | | | | | | |
| DAR/Ral | DAR/Ral | DAR/Ral/Bi-Color | DAR/Ral/Bi-Color | DAR/Ral/Bi-Color | | | DAR/Ral/Bi-Color | DAR/Ral/Bi-Color | |
| 1200 | 1500 | 1500 | 1500 | 1500 | | | 1500 | n/a | |
| handle 15 | handle 15 | handle 15 | handle 40 | handle 30/10 | handle 30/17 | handle 30 | handle 10 | manual | |
| 1500 | 1500 | 1500 | 1500 | 1500 | | | 1500 | n/a | |
|  |  |  |  |  | | |  |  | |

TECHNICAL SPECIFICATIONS

→ Ventilation values

| Property | | Regulation | Unit | 2500 EA | | | 5000 EA | | | 10 | 15 | 20 | 25 | Corto 10 | Corto 15 | Corto 20 | Corto 25 |
|---------------------------------|----------|------------|--------|-----------------|-----------------|------------------|-----------------|-----------------|------------------|---------|-------|-------|-------|----------|----------|----------|----------|
| | | | | Double Acoustic | Acoustic Inside | Acoustic Outside | Double Acoustic | Acoustic Inside | Acoustic Outside | | | | | | | | |
| Airflow (Q) without DucoFilter | at 1 Pa | EN 13141-1 | l/s/m | 2,5 | 2,8 | 2,7 | 3,9 | 4,2 | 4,2 | 15,9 | 21,1 | 24,1 | 28,6 | 13,0 | 20,7 | 26,9 | 32,0 |
| | at 2 Pa | | | 3,5 | 3,9 | 3,8 | 5,6 | 5,9 | 6,1 | 18,2 | 24,6 | 30,4 | 34,4 | 24,1 | 25,7 | 39,3 | 42,5 |
| | at 10 Pa | | | 8,0 | 9,0 | 8,8 | 12,7 | 13,2 | 13,8 | 16,8 | 20,7 | 27,6 | 29,3 | 20,2 | 22,4 | 35,3 | 30,4 |
| | at 1 Pa | EN 13141-1 | m³/h/m | 9,0 | 10,1 | 9,7 | 14,0 | 15,1 | 15,1 | 57,2 | 76,0 | 86,8 | 103,0 | 46,8 | 74,5 | 96,8 | 115,2 |
| | at 2 Pa | | | 12,6 | 14,0 | 13,7 | 20,2 | 21,2 | 22,0 | 65,6 | 88,4 | 109,3 | 123,9 | 86,7 | 92,5 | 141,5 | 152,9 |
| | at 10 Pa | | | 28,8 | 32,4 | 31,7 | 45,7 | 47,5 | 49,7 | 60,3 | 74,6 | 99,3 | 105,3 | 72,8 | 80,8 | 127,1 | 109,3 |
| Airflow (Q) with DucoFilter | at 1 Pa | EN 13141-1 | l/s/m | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| | at 2 Pa | | | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| | at 10 Pa | | | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| | at 1 Pa | EN 13141-1 | m³/h/m | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| | at 2 Pa | | | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| | at 10 Pa | | | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| Equivalent area at 1 Pa | | EN 13141-1 | mm²/m | 3040 | 3346 | 3543 | 5046 | 5263 | 5394 | 20233 | 26850 | 30667 | 36394 | 16543 | 26341 | 34230 | 40720 |
| Geometrical Free Area | | EN 13141-1 | mm²/m | 4511 | | | 6450 | | | 10000 | 15000 | 20000 | 25000 | 10000 | 15000 | 20000 | 25000 |
| U-value | | EN 10077-2 | W/m²K | - | | | | | | 1,56 | | | | 2,58 | | | |
| Self-regulating | | EN 13141-1 | | no | | | | | | yes | | | | yes | | | |
| Wind tightness class | | EN 12207 | Class | Class 2 | | | | | | Class 3 | | | | Class 2 | | | |
| Water tightness closed position | | EN 1026 | Pa | 300 | | | | | | 600 | | | | 600 | | | |
| Water tightness class | | EN 12208 | Class | 9A | | | | | | E1050 | | | | E1050 | | | |
| Water tightness closed position | | EN 1027 | Pa | 600 | | | | | | 1050 | | | | 1050 | | | |


→ Sound reduction

| Property | | Regulation | Unit | 2500 EA | | | 5000 EA | | | 10 | 15 | 20 | 25 | Corto 10 | Corto 15 | Corto 20 | Corto 25 |
|-----------------------------------|--|------------|------|-----------------|-----------------|------------------|-----------------|-----------------|------------------|------|------|------|------|----------|----------|----------|----------|
| | | | | Double Acoustic | Acoustic Inside | Acoustic Outside | Double Acoustic | Acoustic Inside | Acoustic Outside | | | | | | | | |
| D _{ae} W open position | | EN ISO 717 | dB | 42 | 37 | 37 | 37 | 34 | 34 | 37 | 35 | 34 | 27 | 41 | 38 | 36 | 35 |
| C open position | | EN ISO 717 | dB | -2 | 0 | 0 | -1 | 0 | 0 | -1 | -1 | 0 | 0 | -1 | -1 | -1 | -1 |
| C _{tr} open position | | EN ISO 717 | dB | -3 | 0 | 0 | -2 | -1 | 0 | -3 | -2 | -2 | -1 | -2 | -3 | -2 | -2 |
| D _{ae} W closed position | | EN ISO 717 | dB | 56 | 57 | 54 | 53 | 51 | 51 | 50 | 51 | 49 | 42 | 57 | 55 | 54 | 53 |
| C closed position | | EN ISO 717 | dB | -3 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | 0 | 0 | -2 | -2 | -2 | -1 |
| C _{tr} closed position | | EN ISO 717 | dB | -5 | -5 | -4 | -4 | -3 | -3 | -3 | -4 | -3 | -1 | -4 | -4 | -3 | -2 |
| Octave band values | | | dB | | | | | | | | | | | | | | |
| | | at 125 Hz | dB | 41,2 | 41,5 | 41,5 | 41,4 | 41,4 | 41,4 | 33,7 | 32,9 | 33,2 | 24,7 | 31,5 | 29,2 | 28,6 | 28,0 |
| | | at 250 Hz | dB | 38,9 | 39,9 | 39,9 | 37,6 | 38,4 | 38,2 | 31,1 | 31,0 | 31,1 | 26,7 | 31,6 | 28,9 | 27,9 | 27,3 |
| | | at 500 Hz | dB | 33,8 | 32,4 | 32,9 | 29,7 | 30,5 | 30,5 | 28,6 | 27,9 | 27,9 | 24,9 | 40,6 | 35,0 | 32,7 | 31,8 |
| | | at 1000 Hz | dB | 43,2 | 38,1 | 38,1 | 36,6 | 33,8 | 35,2 | 39,2 | 36,2 | 34,8 | 26,8 | 45,9 | 40,1 | 38,5 | 37,0 |
| | | at 2000 Hz | dB | 46,4 | 37,4 | 37,4 | 41,9 | 34,6 | 35,7 | 46,4 | 40,5 | 38,6 | 28,0 | 40,4 | 37,9 | 36,8 | 35,2 |





→ General specification

| Property | | Regulation | Unit | 2500 EA | | | 5000 EA | | | 10 | 15 | 20 | 25 | Corto 10 | Corto 15 | Corto 20 | Corto 25 |
|--|--|------------|------|--|-----------------|------------------|-----------------|-----------------|------------------|--|----|----|----|--|----------|----------|----------|
| | | | | Double Acoustic | Acoustic Inside | Acoustic Outside | Double Acoustic | Acoustic Inside | Acoustic Outside | | | | | | | | |
| Finish | | | | DAR/Ral/Bi-Color | | | | | | DAR/Ral/Bi-Color | | | | DAR/Ral/Bi-Color | | | |
| Maximum drum- / flap length under warranty | | | mm | n/a | | | | | | 2000 | | | | 2000 | | | |
| Standard control | | | | manual | | | | | | flap handle 15 | | | | flap handle 15 | | | |
| Split ventilation flap from vent length | | | mm | n/a | | | | | | 2000 | | | | 2000 | | | |
| Endcap colours | | | | <div style="display: flex; gap: 10px;"> </div> | | | | | | <div style="display: flex; gap: 10px;"> </div> | | | | <div style="display: flex; gap: 10px;"> </div> | | | |

Endcap colours



SOUND ABSORBING VENTS

| DucoMax SR SkyMax SR see p. 28 | | | | DucoMax SR SkyMax SR see p. 28 | | | | DucoMax SR SkyMax SR see p. 28 | | | | Silenzio SR see p. 30 | | Silenzio Retro SR see p. 30 | |
|---|----------|----------|----------|---|---------|---------|---------|---|----------|----------|----------|---|-------|--------------------------------|-----------------------|
| Medio 10 | Medio 15 | Medio 20 | Medio 25 | Alto 10 | Alto 15 | Alto 20 | Alto 25 | Largo 10 | Largo 15 | Largo 20 | Largo 25 | standard | AK | without outside cap | with Duco outside cap |
| 11,2 | 17,7 | 25,6 | 30,8 | 11,9 | 17,5 | 26,3 | 29,7 | 11,9 | 17,9 | 26,9 | 28,9 | 16,6 | 9,0 | 10,7 | 9,0 |
| 24,1 | 25,7 | 39,3 | 42,5 | 24,1 | 25,7 | 39,3 | 42,5 | 24,1 | 25,7 | 39,3 | 42,5 | 16,5 | 10,1 | 15,2 | 12,9 |
| 20,2 | 22,4 | 35,3 | 30,4 | 20,2 | 22,4 | 35,3 | 30,4 | 20,2 | 22,4 | 35,3 | 30,4 | 16,4 | 10,3 | 10,1 | 10,1 |
| 40,3 | 63,7 | 92,2 | 110,9 | 42,8 | 63,0 | 94,7 | 106,9 | 42,8 | 64,4 | 96,8 | 104,0 | 59,8 | 32,4 | 38,5 | 32,4 |
| 86,7 | 92,5 | 141,5 | 152,9 | 86,7 | 92,5 | 141,5 | 152,9 | 86,7 | 92,5 | 141,5 | 152,9 | 59,4 | 36,4 | 54,7 | 46,5 |
| 72,8 | 80,8 | 127,1 | 109,3 | 72,8 | 80,8 | 127,1 | 109,3 | 72,8 | 80,8 | 127,1 | 109,3 | 59,1 | 37,1 | 36,4 | 36,4 |
| n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| 14252 | 22523 | 32576 | 39193 | 15143 | 22269 | 33467 | 37793 | 15143 | 22778 | 34230 | 36775 | 21060 | 11478 | 13616 | 11453 |
| 10000 | 15000 | 20000 | 25000 | 10000 | 15000 | 20000 | 25000 | 10000 | 15000 | 20000 | 25000 | 17600 | 17600 | 17600 | 11500 |
| 2,58 | | | | 2,58 | | | | 2,58 | | | | 4,76 | 4,76 | 4,76 | 4,76 |
| yes | | | | yes | | | | yes | | | | yes | | yes | |
| Class 2 | | | | Class 2 | | | | Class 2 | | | | Class 2 | | Class 2 | |
| 600 | | | | 600 | | | | 600 | | | | 300 | | 300 | |
| E1050 | | | | E1050 | | | | E1050 | | | | 9A | | 9A | |
| 1050 | | | | 1050 | | | | 1050 | | | | 600 | | Depends on outside section | 600 |
| | | | | | | | | | | | | | | | |
| Medio 10 | Medio 15 | Medio 20 | Medio 25 | Alto 10 | Alto 15 | Alto 20 | Alto 25 | Largo 10 | Largo 15 | Largo 20 | Largo 25 | standard | AK | without outside cap | with Duco outside cap |
| 44 | 40 | 39 | 37 | 46 | 42 | 40 | 38 | 49 | 43 | 41 | 38 | 39 | 48 | 43 | 43 |
| -1 | -1 | -2 | -1 | -2 | -1 | -1 | -1 | -1 | -1 | -2 | -1 | -1 | -1 | -1 | -1 |
| -4 | -4 | -4 | -4 | -6 | -5 | -4 | -4 | -5 | -4 | -4 | -3 | -4 | -4 | -3 | -3 |
| 58 | 57 | 55 | 55 | 60 | 58 | 57 | 56 | 62 | 60 | 57 | 55 | 50 | 61 | 64 | 64 |
| -2 | -2 | -2 | -1 | -2 | -2 | -2 | -2 | -2 | -1 | -1 | -1 | -2 | -1 | -3 | -3 |
| -5 | -5 | -4 | -4 | -6 | -5 | -6 | -5 | -5 | -5 | -5 | -4 | -5 | -6 | -10 | -10 |
| 32,5 | 30,7 | 29,1 | 28,6 | 32,4 | 30,7 | 30,2 | 29,7 | 34,8 | 32,2 | 30,9 | 30,8 | 27,8 | 35,5 | 37,4 | 37,4 |
| 31,2 | 28,4 | 26,8 | 26,2 | 30,7 | 28,6 | 27,2 | 26,2 | 36,2 | 31,5 | 28,6 | 28,1 | 27,5 | 36,3 | 33,7 | 33,7 |
| 42,8 | 37,2 | 35,6 | 33,7 | 44,8 | 39,1 | 36,7 | 35,1 | 45,5 | 39,0 | 36,3 | 34,0 | 31,9 | 42,7 | 40,8 | 40,8 |
| 48,5 | 42,6 | 40,8 | 38,6 | 52,3 | 45,9 | 43,5 | 41,0 | 54,4 | 45,6 | 44,0 | 39,6 | 46,2 | 65,4 | 42,3 | 42,3 |
| 45,9 | 43,3 | 41,6 | 39,8 | 50,2 | 47,1 | 44,5 | 42,1 | 56,1 | 48,6 | 45,0 | 41,9 | 56,8 | 70,7 | 44,7 | 44,7 |
| | | | | | | | | | | | | | | | |
| Medio 10 | Medio 15 | Medio 20 | Medio 25 | Alto 10 | Alto 15 | Alto 20 | Alto 25 | Largo 10 | Largo 15 | Largo 20 | Largo 25 | standard | AK | without outside cap | with Duco outside cap |
| DAR/Ral/Bi-Color | | | | DAR/Ral/Bi-Color | | | | DAR/Ral/Bi-Color | | | | DAR/Ral/Bi-Color | | DAR/Ral | DAR/Ral/Bi-Color |
| 2000 | | | | 2000 | | | | 2000 | | | | n/a | | n/a | |
| flap handle 15 | | | | flap handle 15 | | | | flap handle 15 | | | | manual | | manual | |
| 2000 | | | | 2000 | | | | 2000 | | | | n/a | | n/a | |
|  | | | |  | | | |  | | | |  | | n/a | |



A **SOLUTION**
FOR EVERY
PROJECT

DUCO
Ventilation & Sun Control